
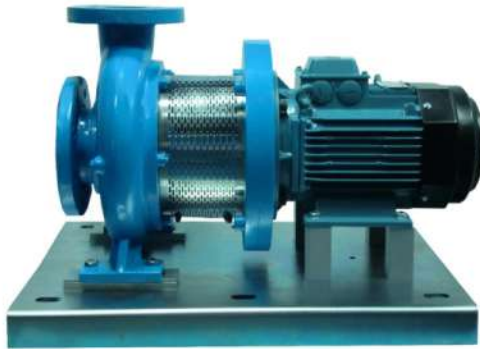


Finsbury - Close couple Pumps 200 Series - 2 Pole - 2920 RPM

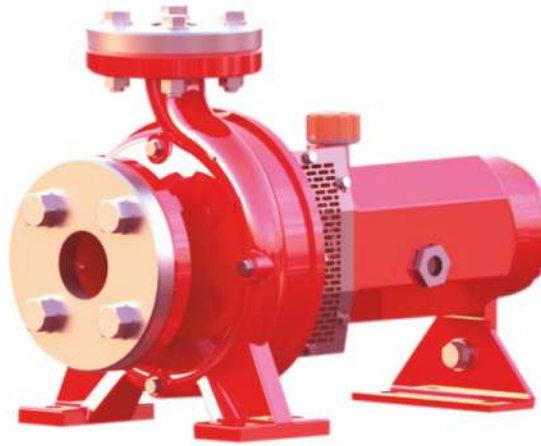

Standard





200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-50X32-200-5.5/2	180	132S	5.5Kw	2950	45.0	6.0
2	FPS-50X32-200-7.5/2	196	132S	7.5Kw	2950	55.0	10.3
3	FPS-50X32-200-11.0/2	212	160M	11.0Kw	2950	66.5	10.5
4	FPS-50X32-200-15.0/2	228	160M	15.0Kw	2950	77.5	10.8

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 50 x 32 - 200 - 2 Pole - Fixed Speed - 2920 RPM

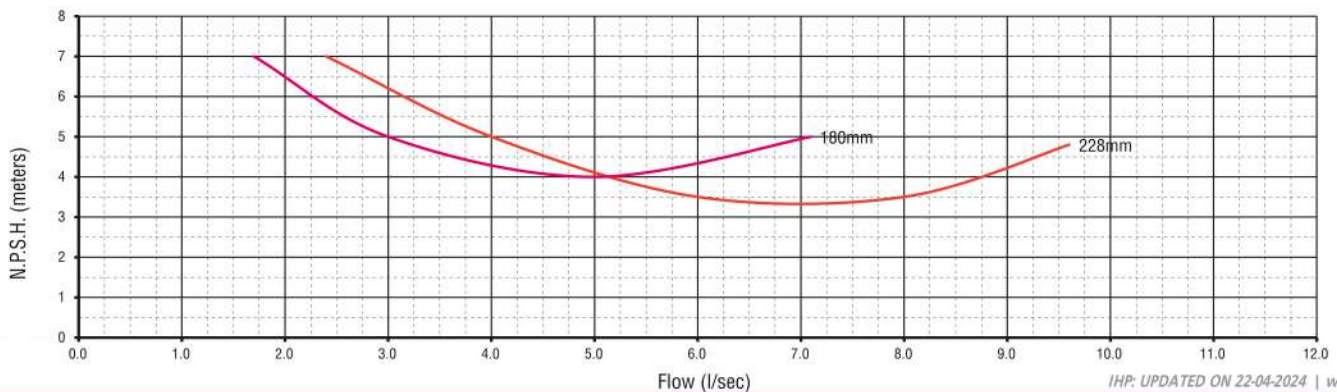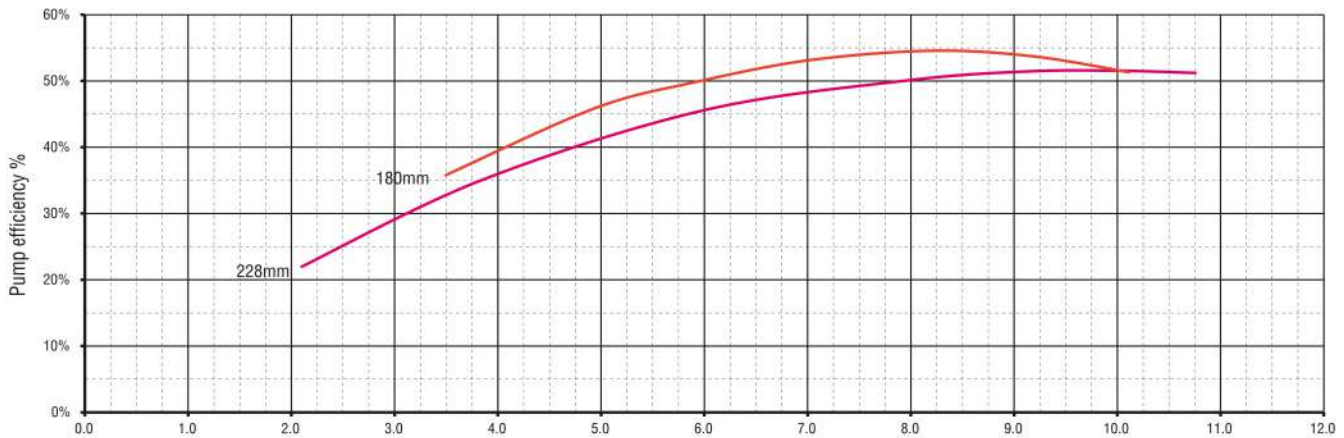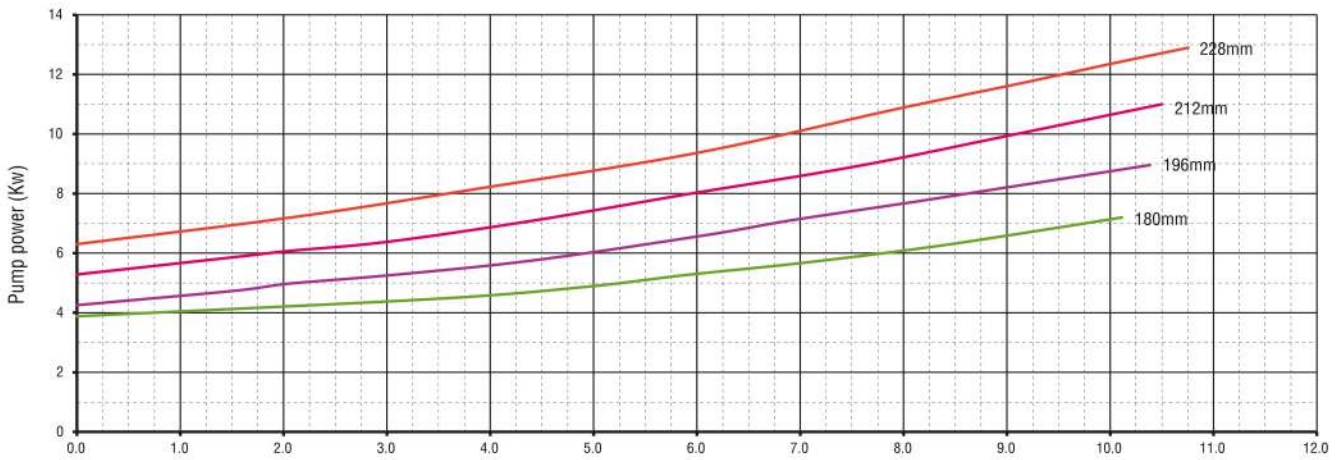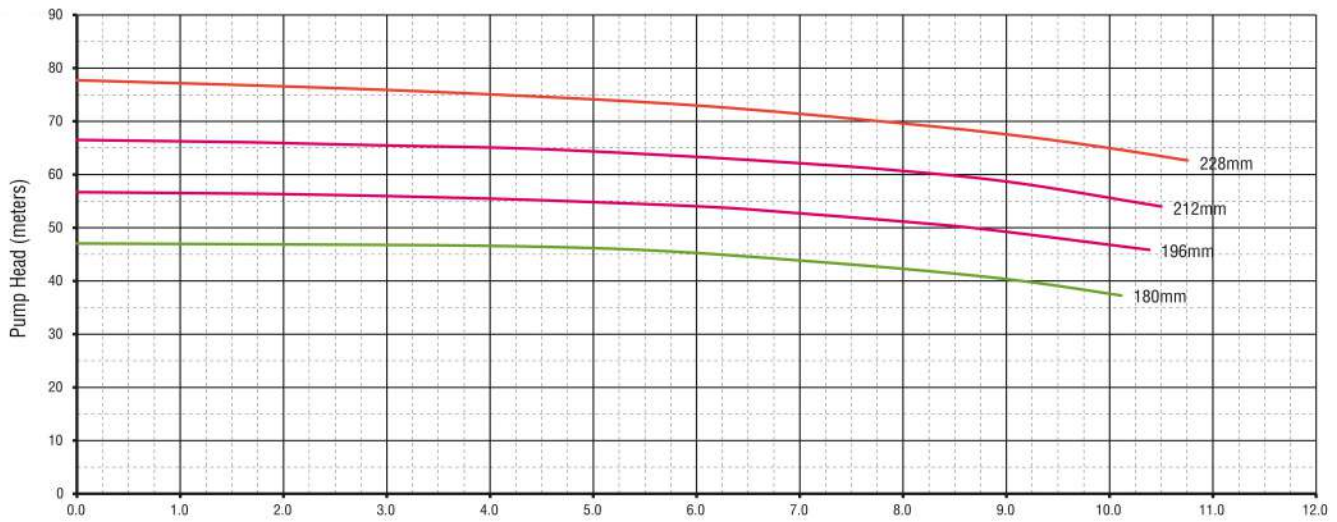

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD



No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 2 Pole - 2920 RPM

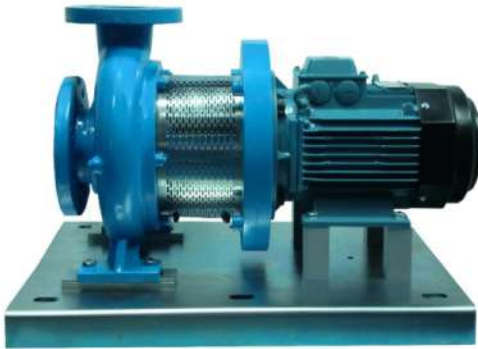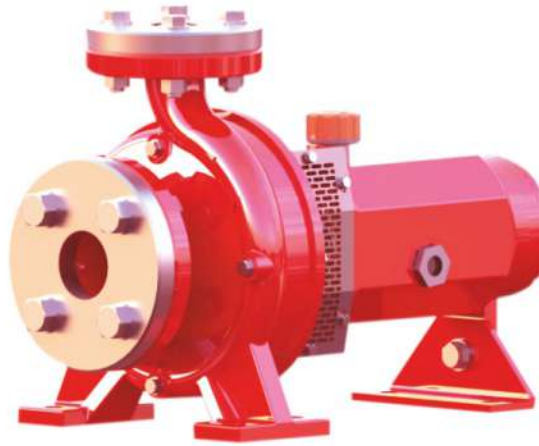

Standard





200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-65X40-200-11.0/2	182	160M	11.0Kw	2950	49.0	14.8
2	FPS-65X40-200-15.0/2	198	160M	15.0Kw	2950	60.0	16.2
3	FPS-65X40-200-18.0/2	213	160L	18.0Kw	2950	73.0	17.2
4	FPS-65X40-200-22.0/2	228	180M	22.0Kw	2950	81.5	18.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 65 x 40 - 200 - 2 Pole - Fixed Speed - 2920 RPM

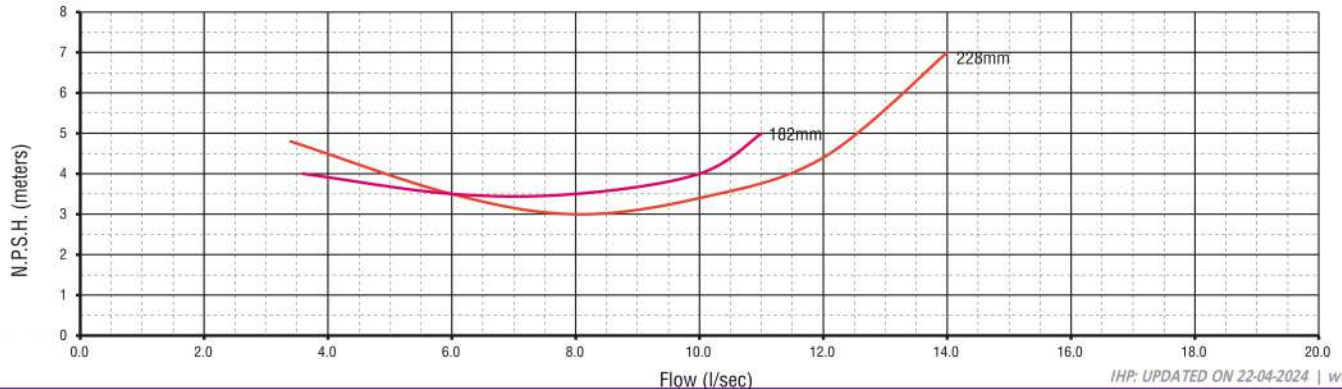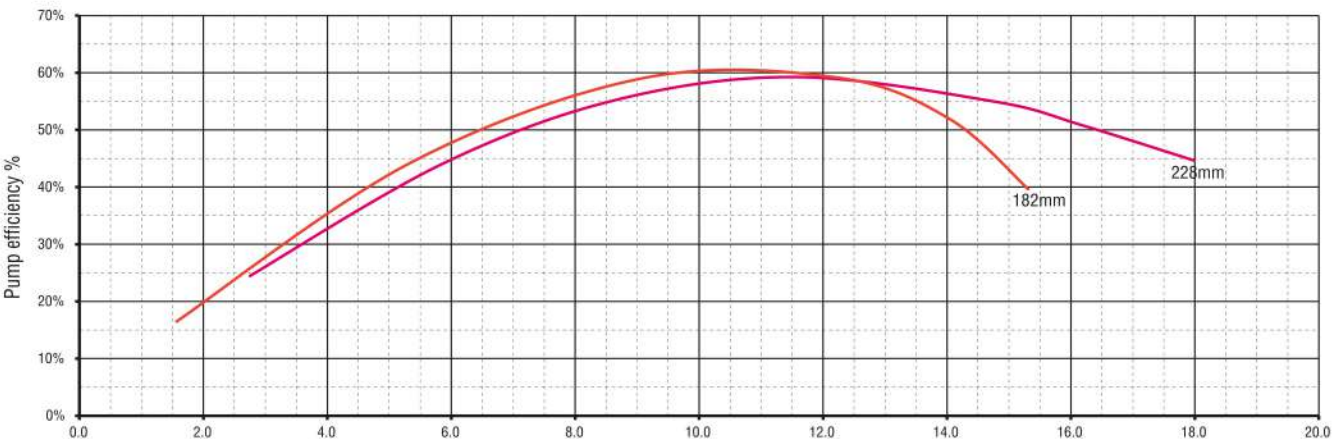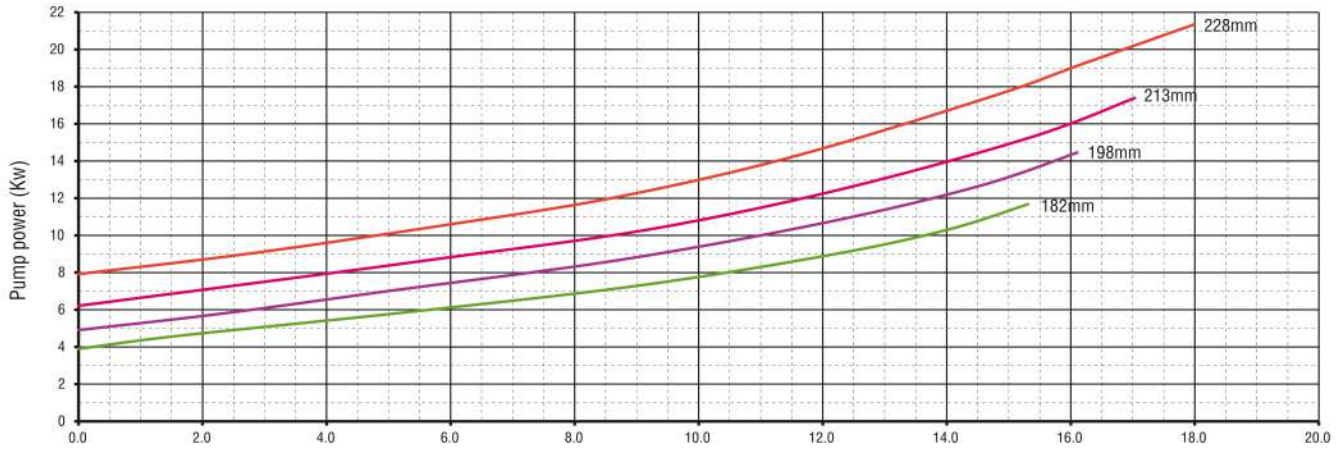
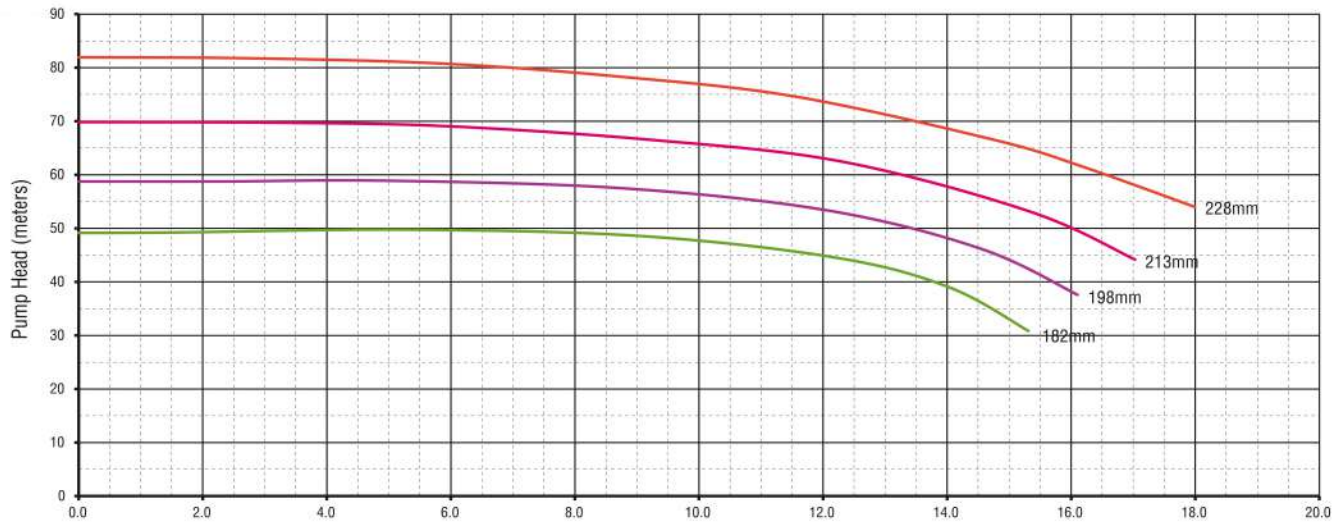


IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road
Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA
Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800
Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 2 Pole - 2920 RPM

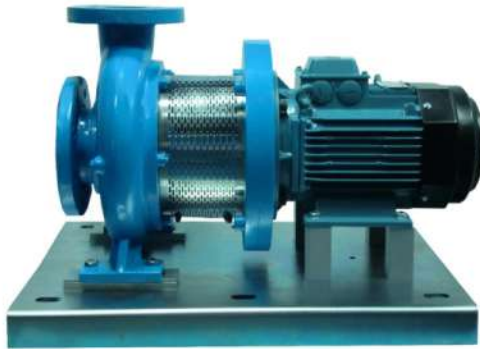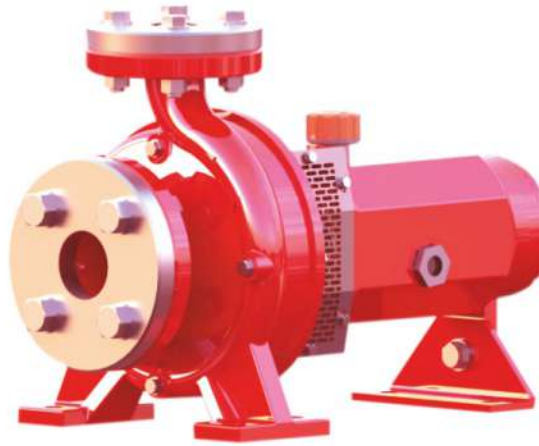

Standard





200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-80X50-200-11.0/2	182	160M	11.0Kw	2950	45.0	20.0
2	FPS-80X50-200-15.0/2	198	160M	15.0Kw	2950	49.0	26.6
3	FPS-80X50-200-18.0/2	206	160L	18.0Kw	2950	58.0	27.2
4	FPS-80X50-200-22.0/2	213	180M	22.0Kw	2950	70.5	29.5
5	FPS-80X50-200-30.0/2	228	200L	30.0Kw	2950	76.5	29.1

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 80 x 50 - 200 - 2 Pole - Fixed Speed - 2920 RPM

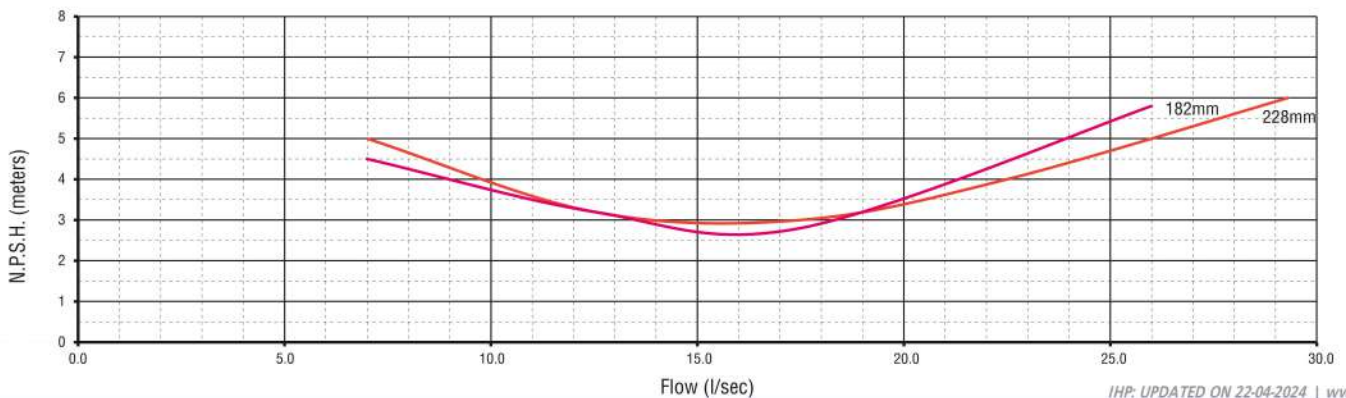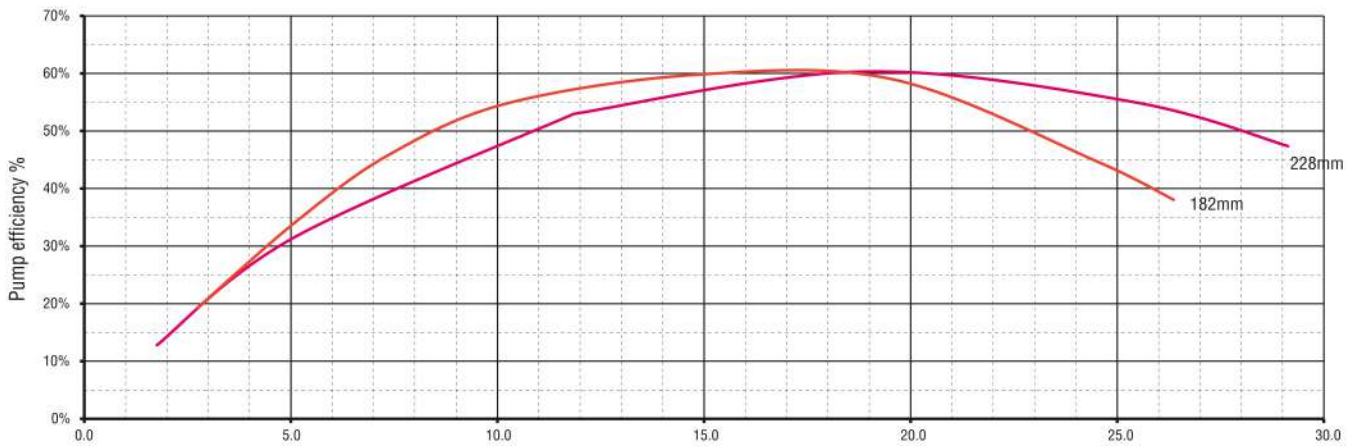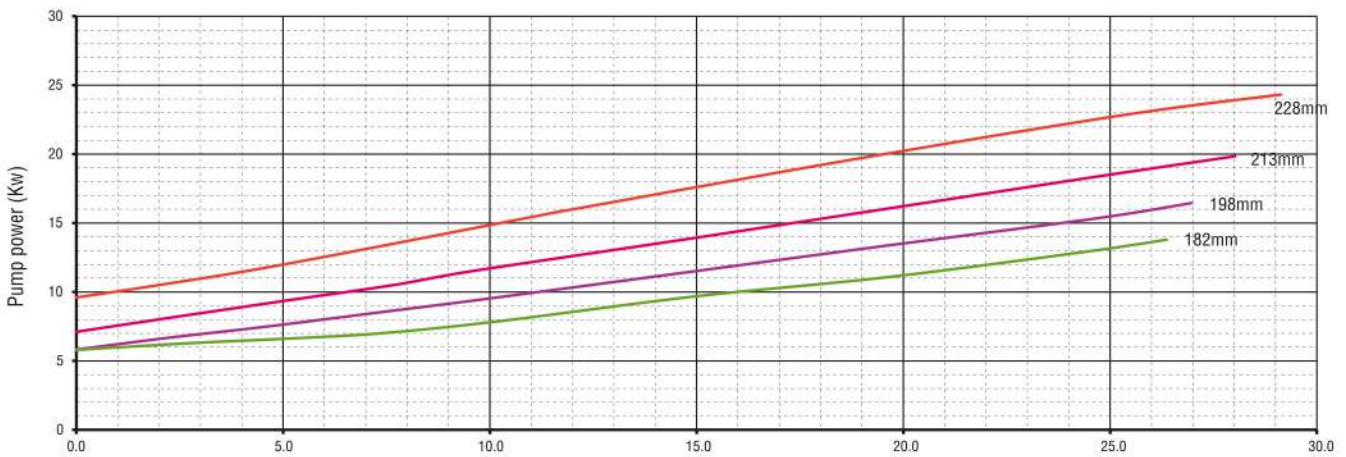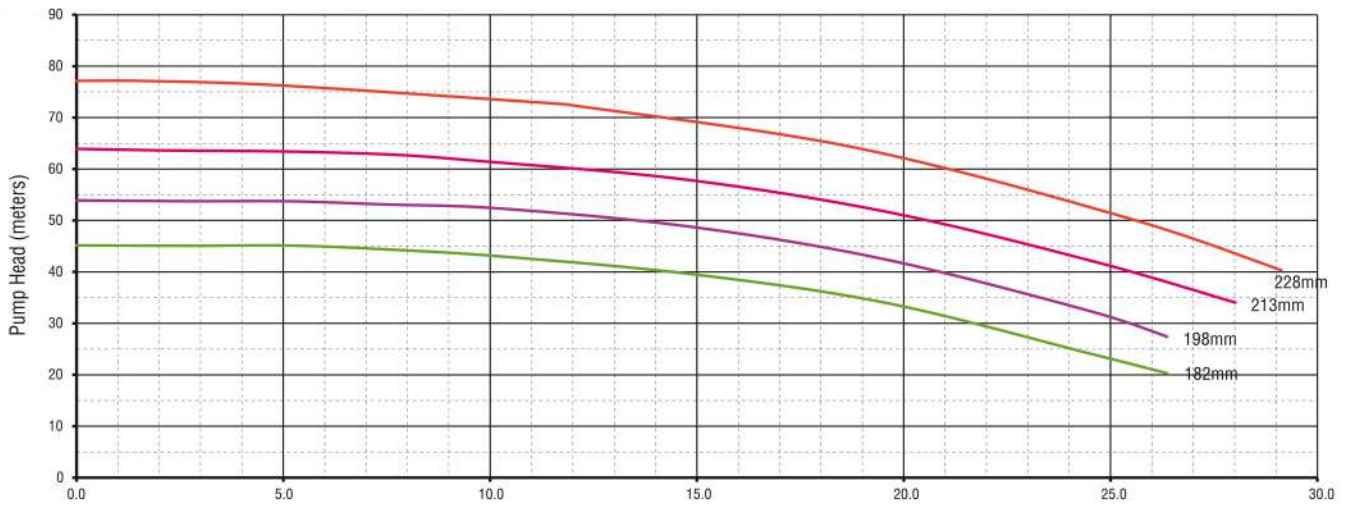

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD


No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 2 Pole - 2920 RPM

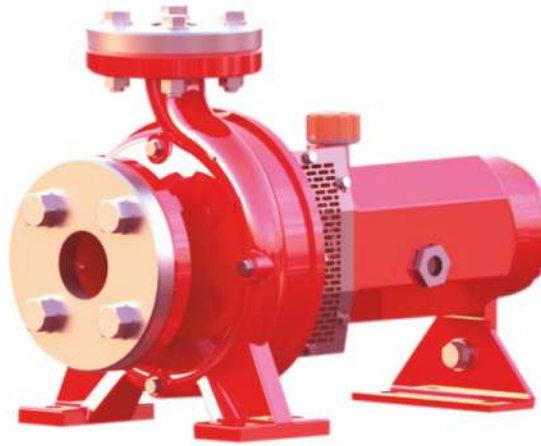

Standard





200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-80X50-200-18.5/2	182	160L	18.5Kw	2950	48.5	34.0
2	FPS-80X50-200-22.0/2	198	180M	22.0Kw	2950	54.0	40.5
3	FPS-80X50-200-30.0/2	213	200L	30.0Kw	2950	64.0	42.0
4	FPS-80X50-200-37.5/2	228	200M	37.5Kw	2950	78.0	45.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 100 x 65 - 200 - 2 Pole - Fixed Speed - 2920 RPM

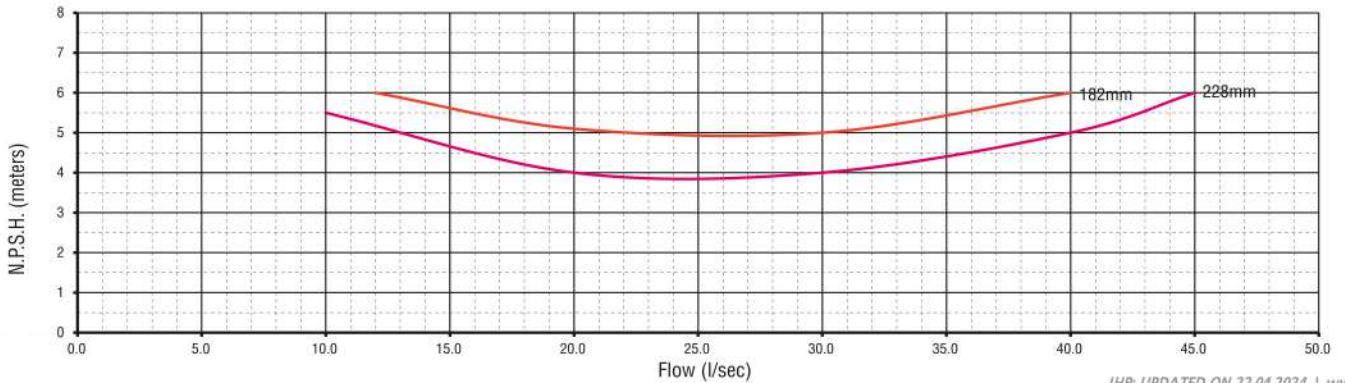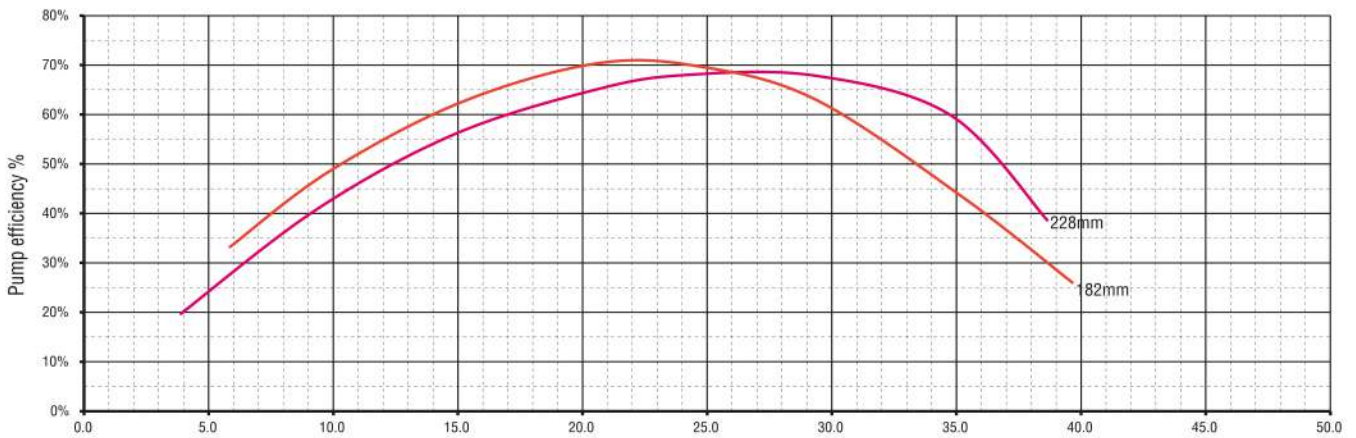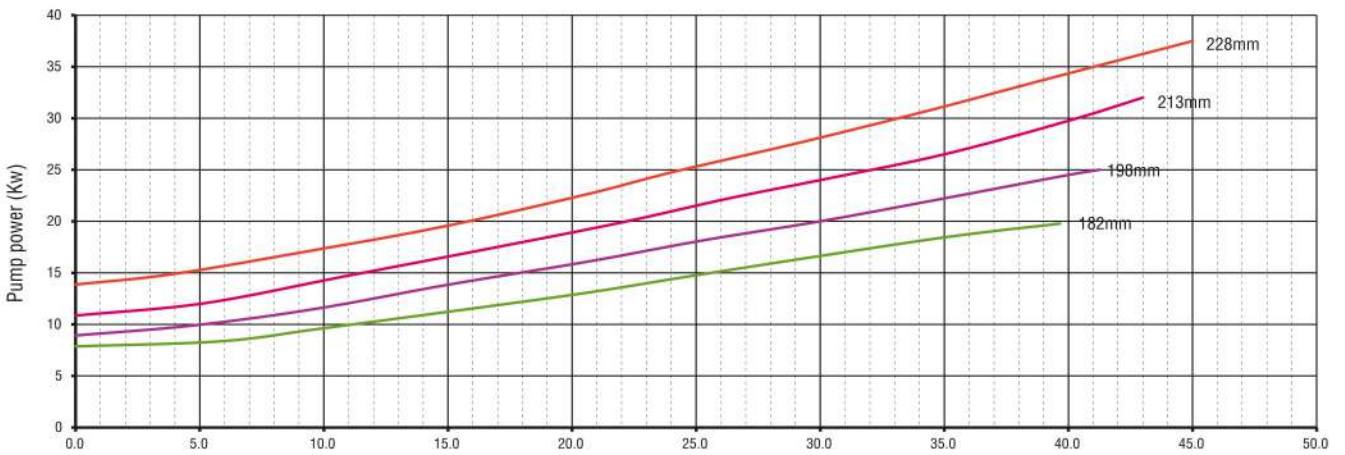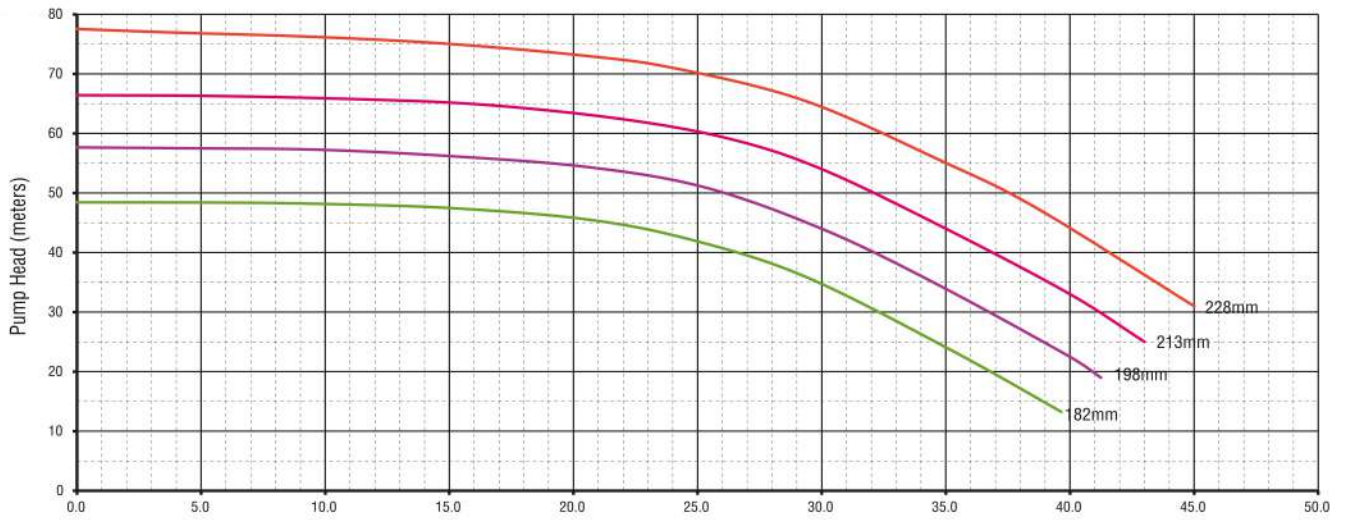

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD



No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 2 Pole - 2920 RPM

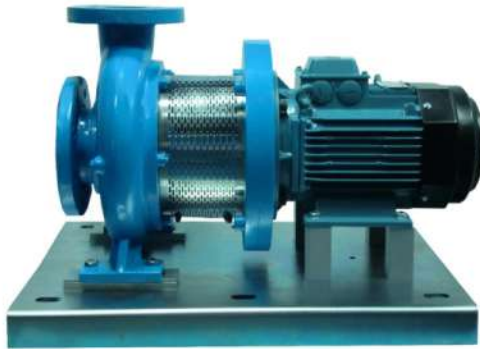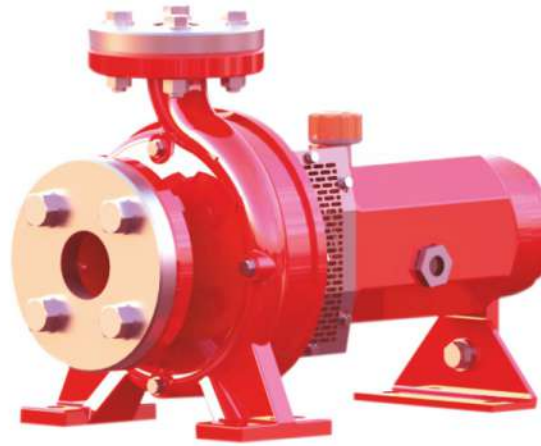

Standard





200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-125X100-200-30.0/2	182	200L	30.0Kw	2950	45.0	65.0
2	FPS-125X100-200-37.0/2	198	200L	37.0Kw	2950	53.0	71.0
3	FPS-125X100-200-45.0/2	213	225M	45.0Kw	2950	62.0	78.0
4	FPS-125X100-200-55.0/2	228	250M	55.0Kw	2950	68.5	82.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 125 x 100 - 200 - 2 Pole - Fixed Speed - 2920 RPM

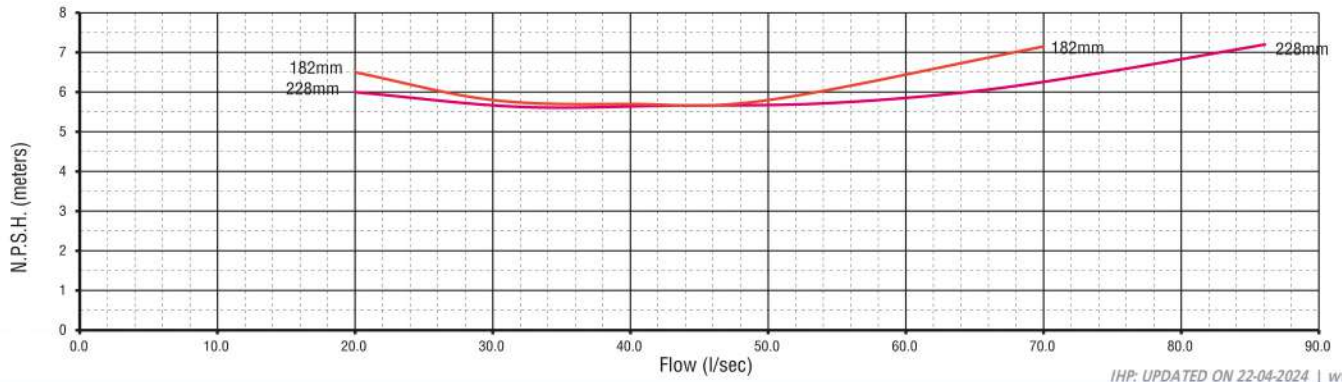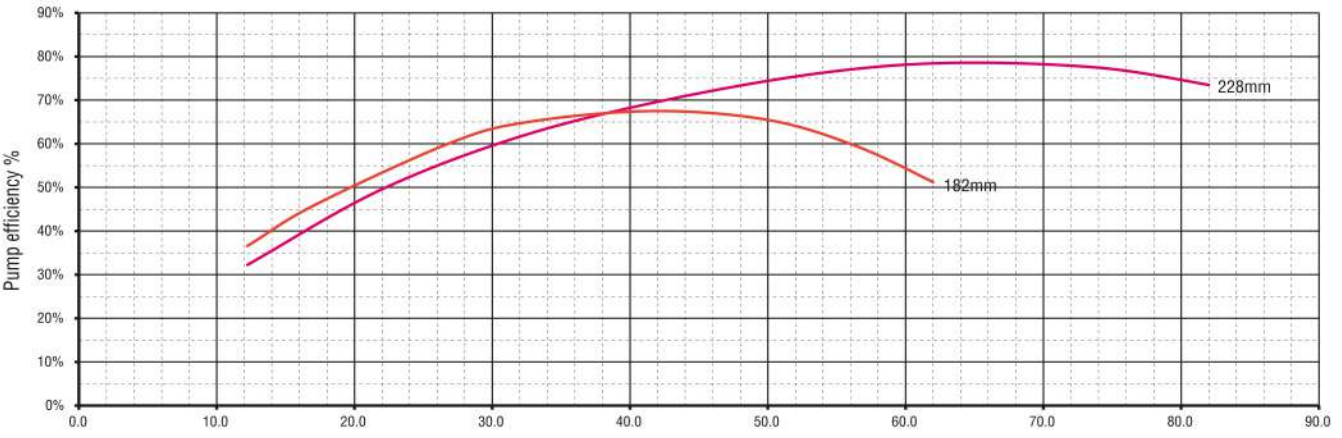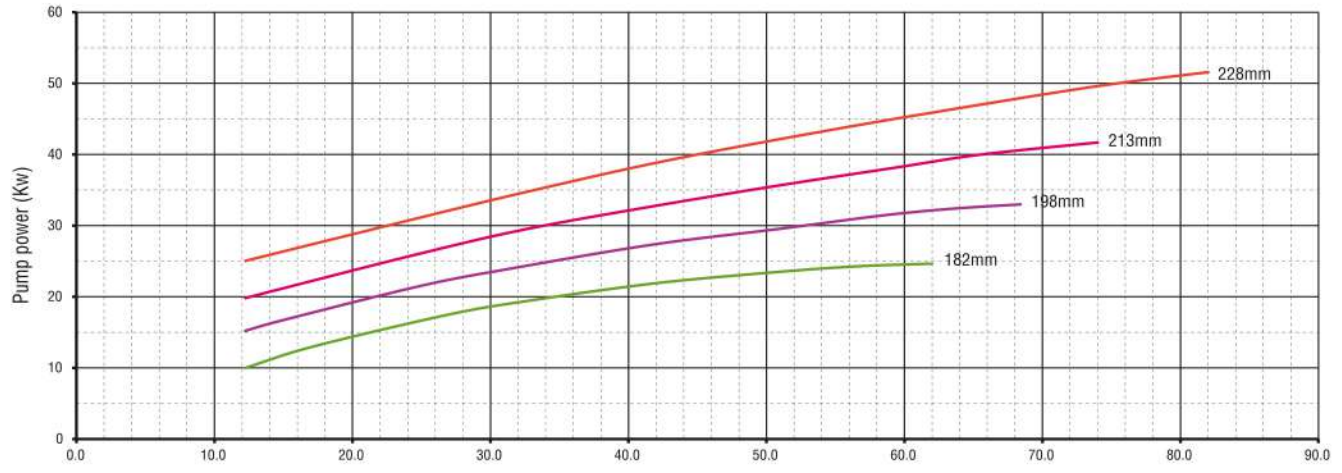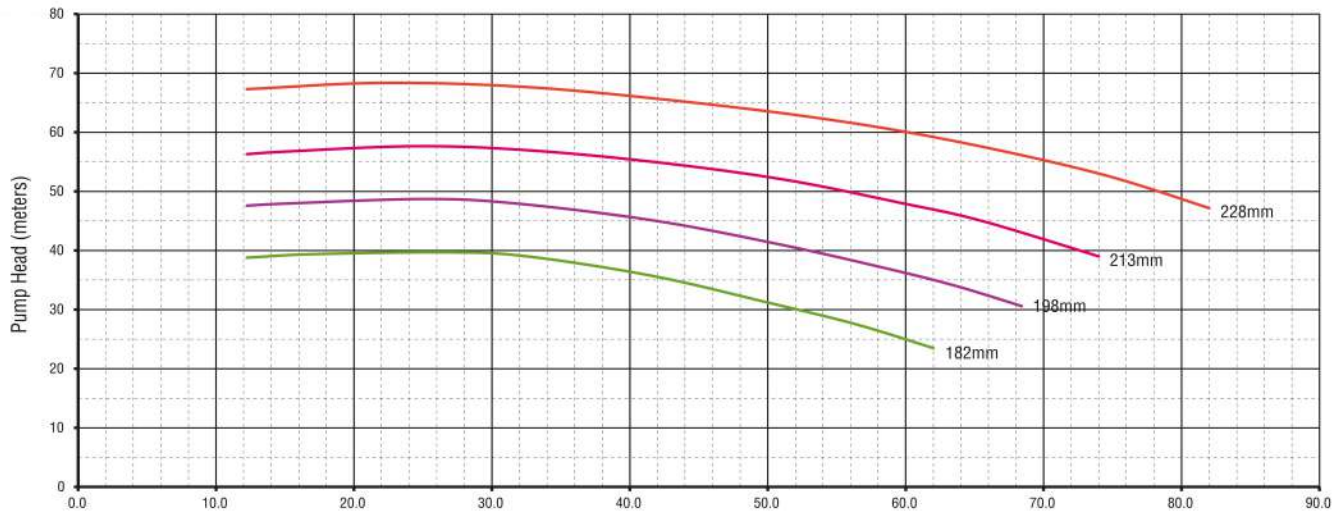

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road
Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA
Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800
Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in