


Finsbury - Close couple Pumps 200 Series - 4 Pole - 1450 RPM

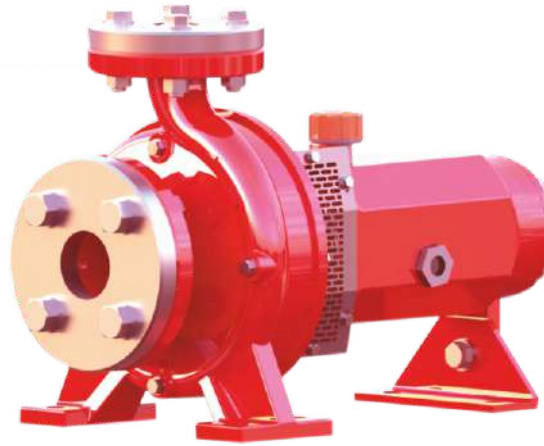

Standard

200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858





| Sl. | Model Number | Impeller Dia mm | Frame Size | Max. Shaft Power | Max. Speed RPM | Max. Head Mtr. | Max. Flow LPS |
|-----|------------------------|-----------------|------------|------------------|----------------|----------------|---------------|
| 1 | FPS-50 x 32-200-0.55/4 | 180 | 80 | 0.55Kw | 1450 | 11.2 | 2.2 |
| 2 | FPS-50 x 32-200-0.75/4 | 196 | 80 | 0.75Kw | 1450 | 11.2 | 4.2 |
| 3 | FPS-50 x 32-200-1.10/4 | 212 | 90S | 1.10Kw | 1450 | 14.1 | 5.1 |
| 3 | FPS-50 x 32-200-1.50/4 | 228 | 90L | 1.50Kw | 1450 | 17.5 | 5.2 |

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

50 x 32 - 200 - 4 Pole - Fixed Speed - 1450 RPM

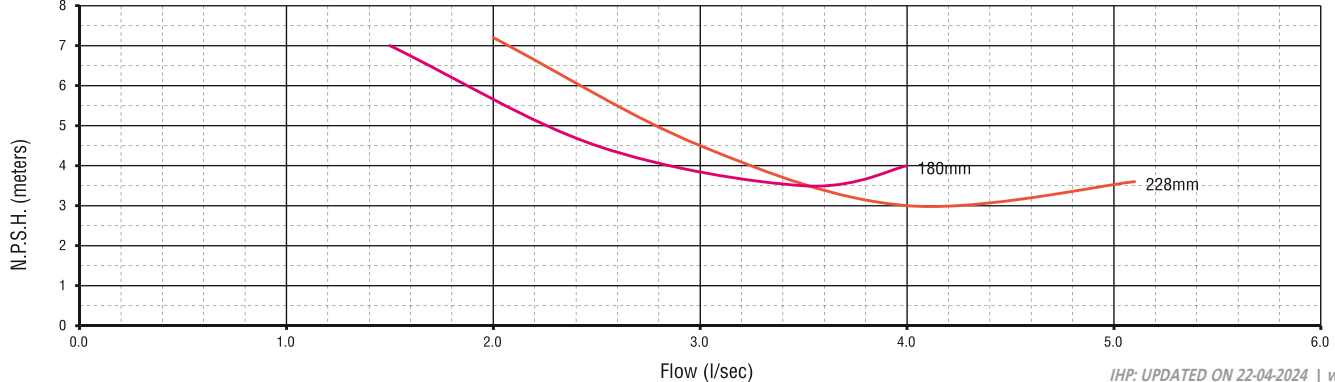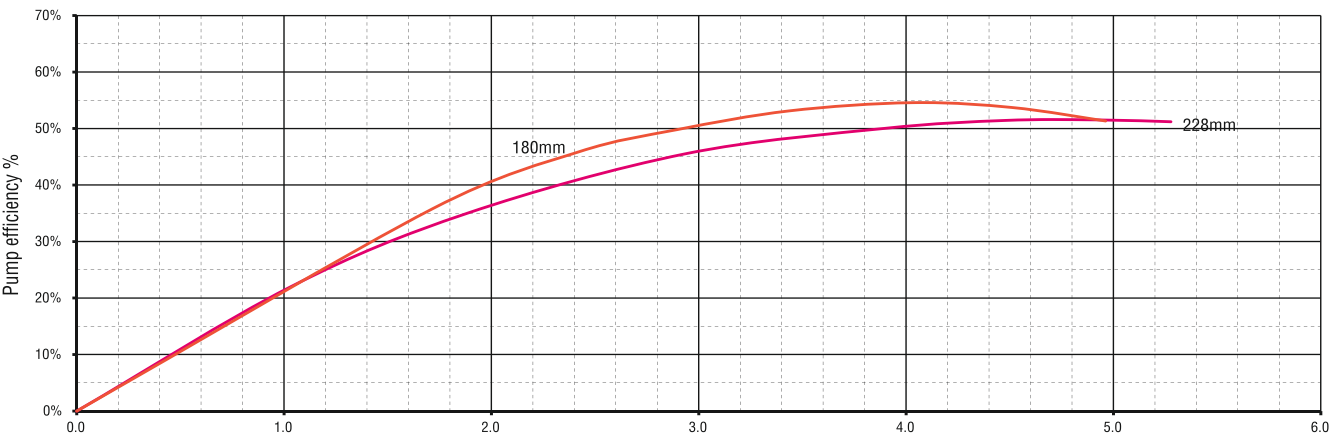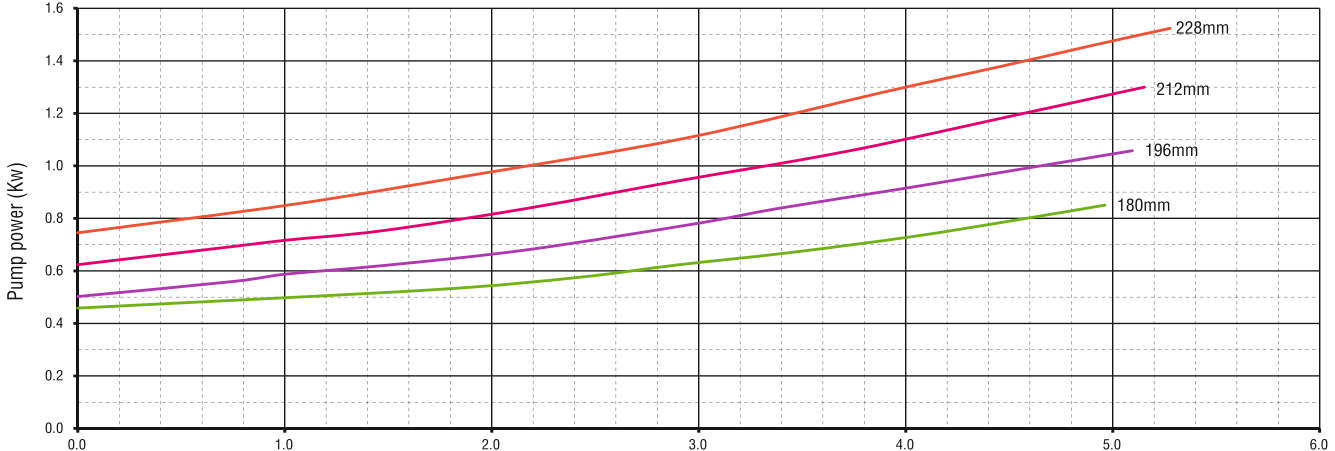
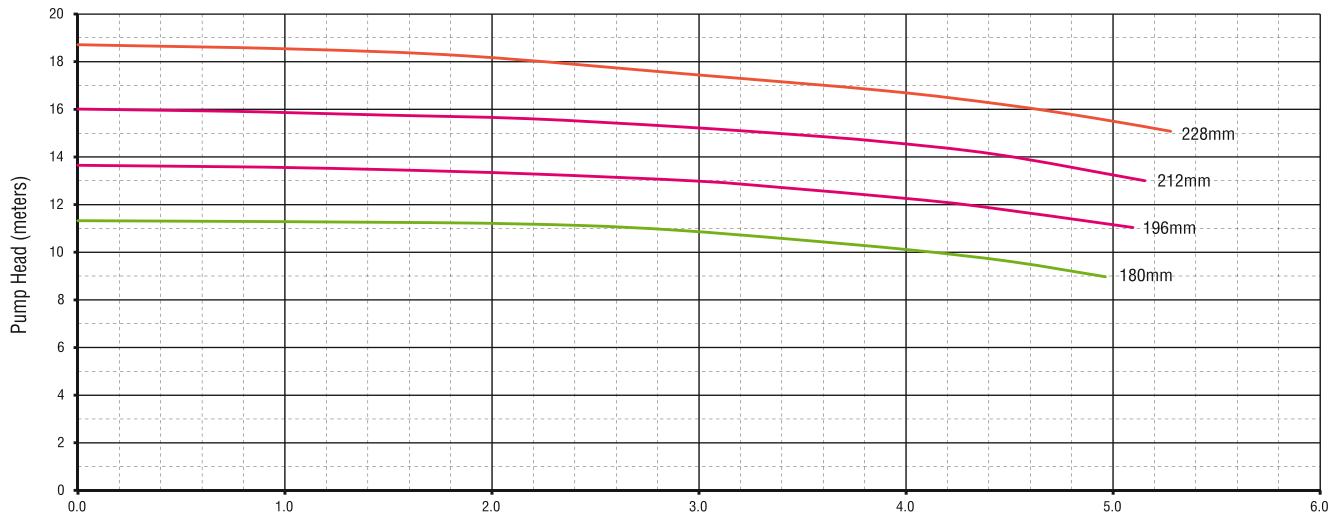


IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road
 Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA
 Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800
 Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 4 Pole - 1450 RPM

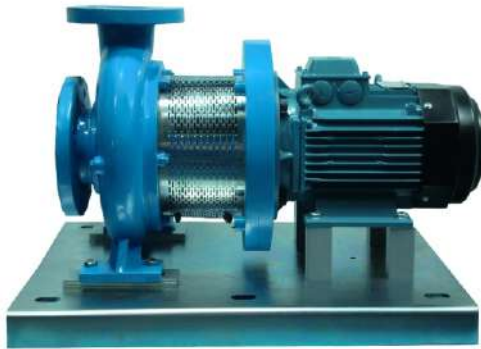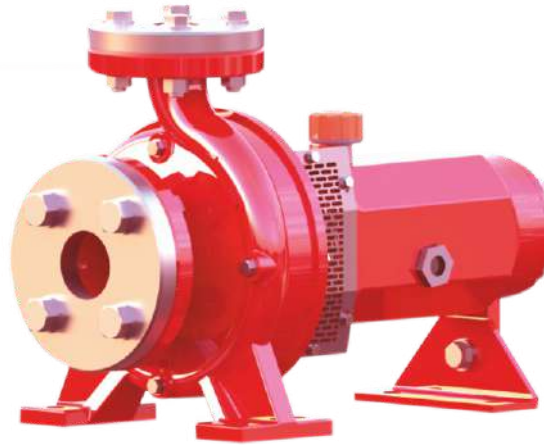

Standard





200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

| Sl. | Model Number | Impeller Dia mm | Frame Size | Max. Shaft Power | Max. Speed RPM | Max. Head Mtr. | Max. Flow LPS |
|-----|------------------------|-----------------|------------|------------------|----------------|----------------|---------------|
| 1 | FPS-65 x 40-200-1.10/4 | 182 | 90S | 1.10Kw | 1450 | 11.4 | 6.4 |
| 2 | FPS-65 x 40-200-1.50/4 | 198 | 90L | 1.50Kw | 1450 | 12.8 | 7.6 |
| 3 | FPS-65 x 40-200-2.20/4 | 213 | 100L | 2.20Kw | 1450 | 18.0 | 8.4 |
| 3 | FPS-65 x 40-200-3.00/4 | 228 | 100L | 3.00Kw | 1450 | 19.0 | 8.7 |

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 65 x 40 - 200 - 4 Pole - Fixed Speed - 1450 RPM

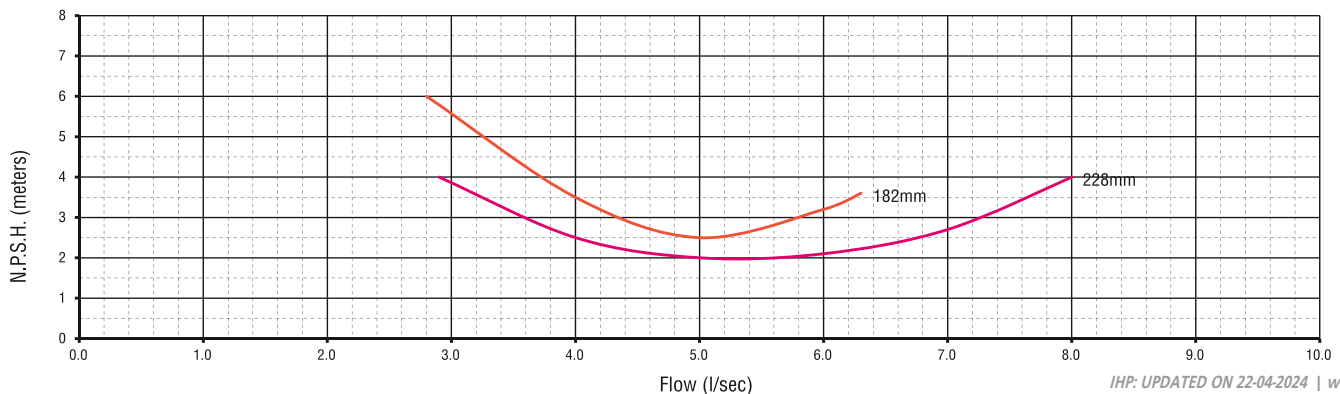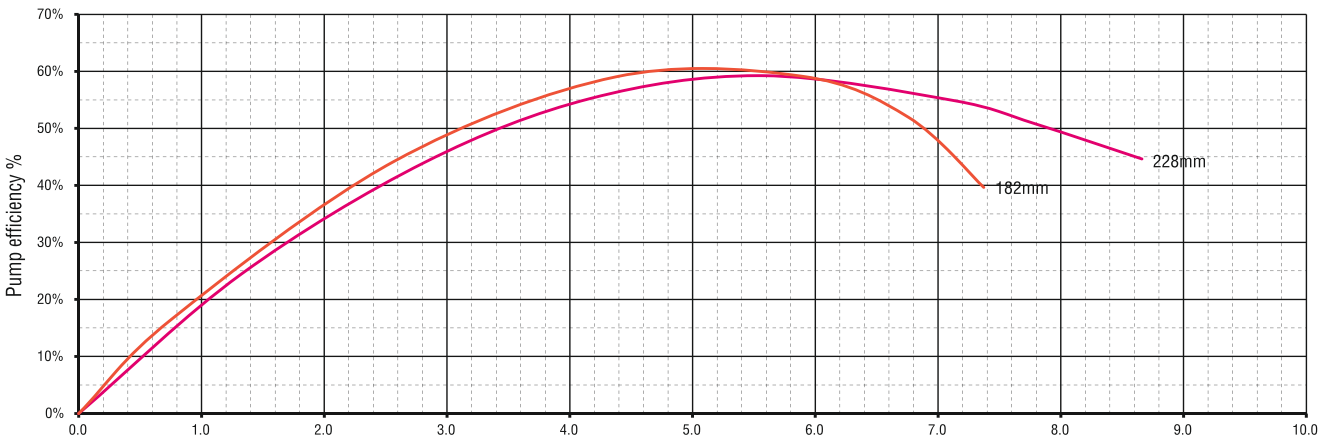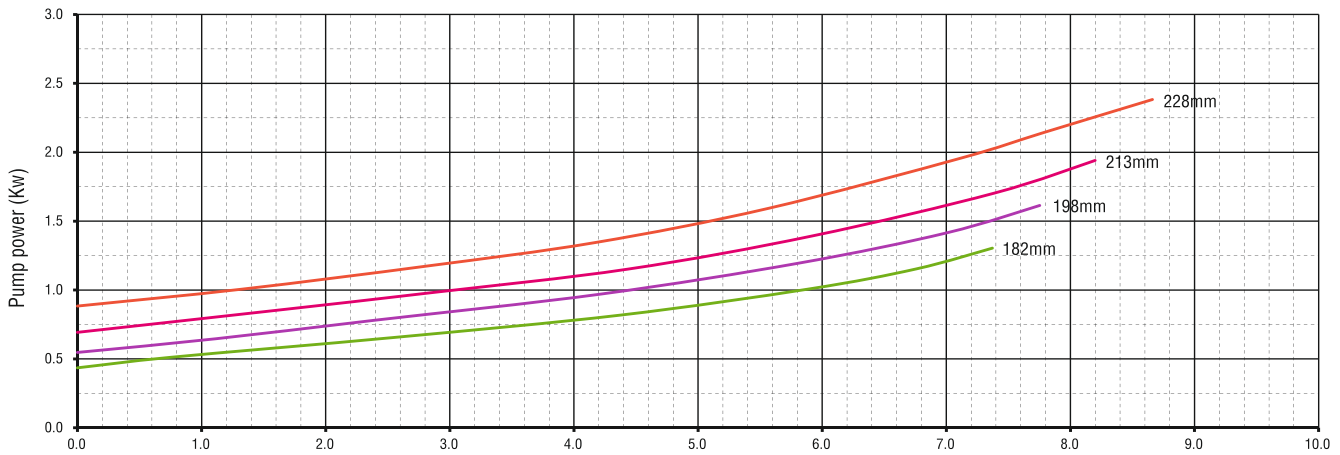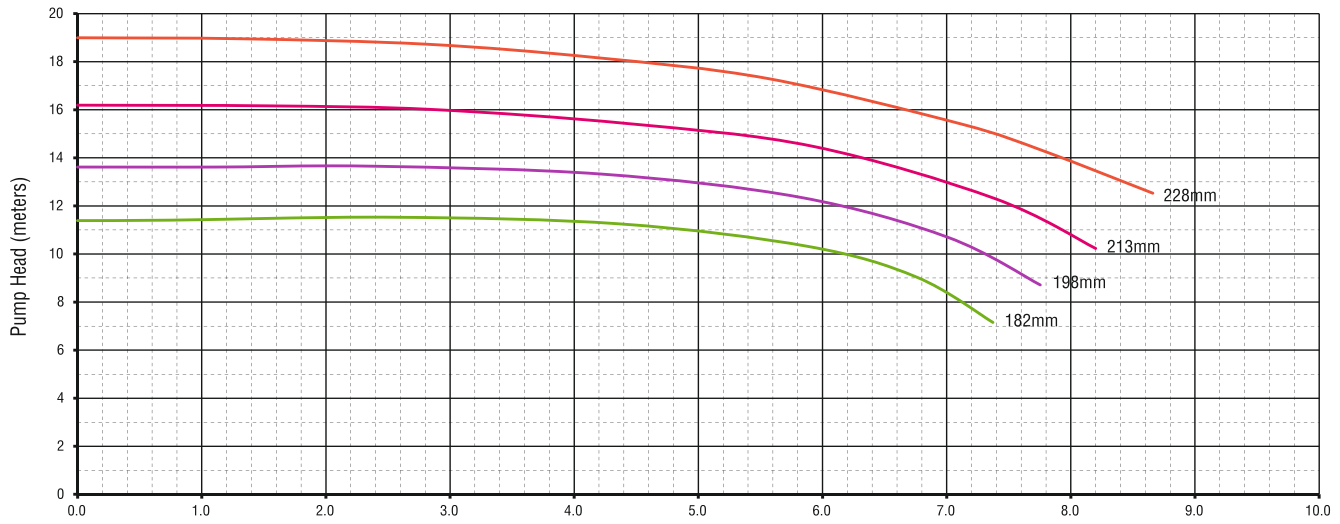

Flow (l/sec)

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD



No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 4 Pole - 1450 RPM

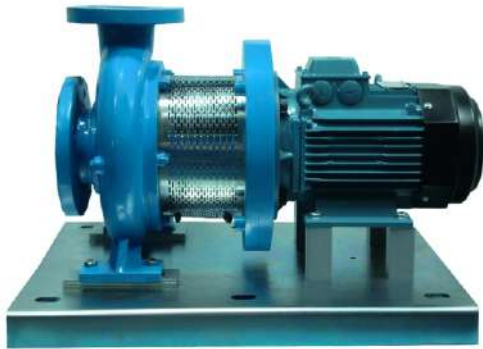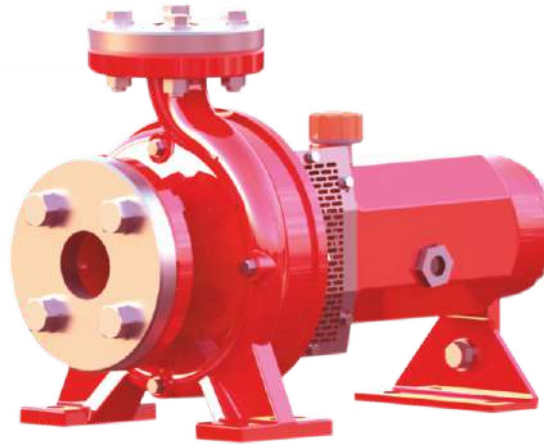

Standard

200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

| Sl. | Model Number | Impeller Dia mm | Frame Size | Max. Shaft Power | Max. Speed RPM | Max. Head Mtr. | Max. Flow LPS |
|-----|------------------------|-----------------|------------|------------------|----------------|----------------|---------------|
| 1 | FPS-80 x 50-200-1.50/4 | 182 | 90L | 1.50Kw | 1450 | 10.5 | 12.0 |
| 2 | FPS-80 x 50-200-2.20/4 | 210 | 100L | 2.20Kw | 1450 | 14.6 | 13.5 |
| 3 | FPS-80 x 50-200-3.00/4 | 228 | 100L | 3.00Kw | 1450 | 18.0 | 14.1 |

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

IHP: UPDATED ON 04-06-2022 | www.ihpindia.in

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road





Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

80 x 50 - 200 - 4 Pole - Fixed Speed - 1450 RPM

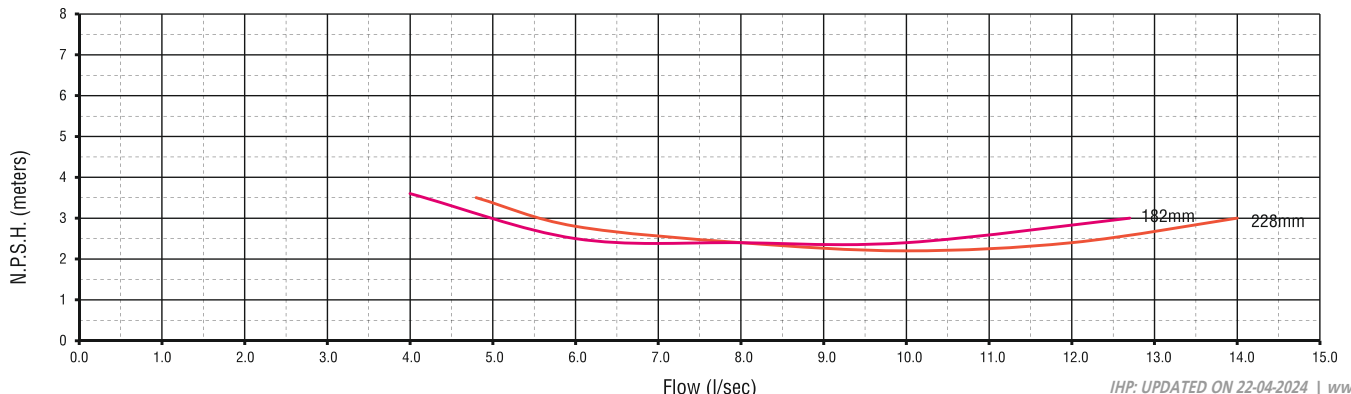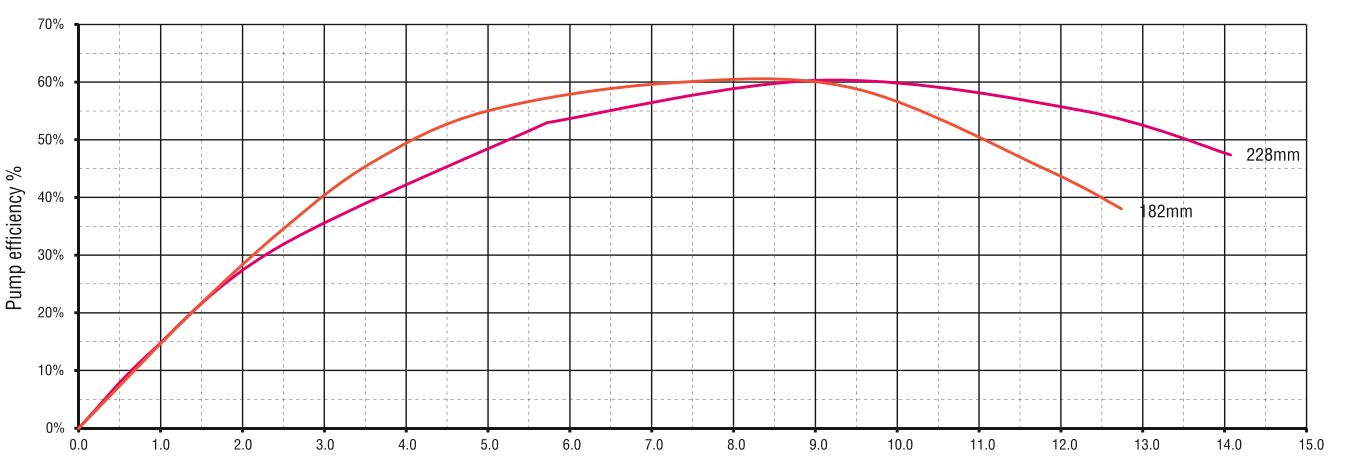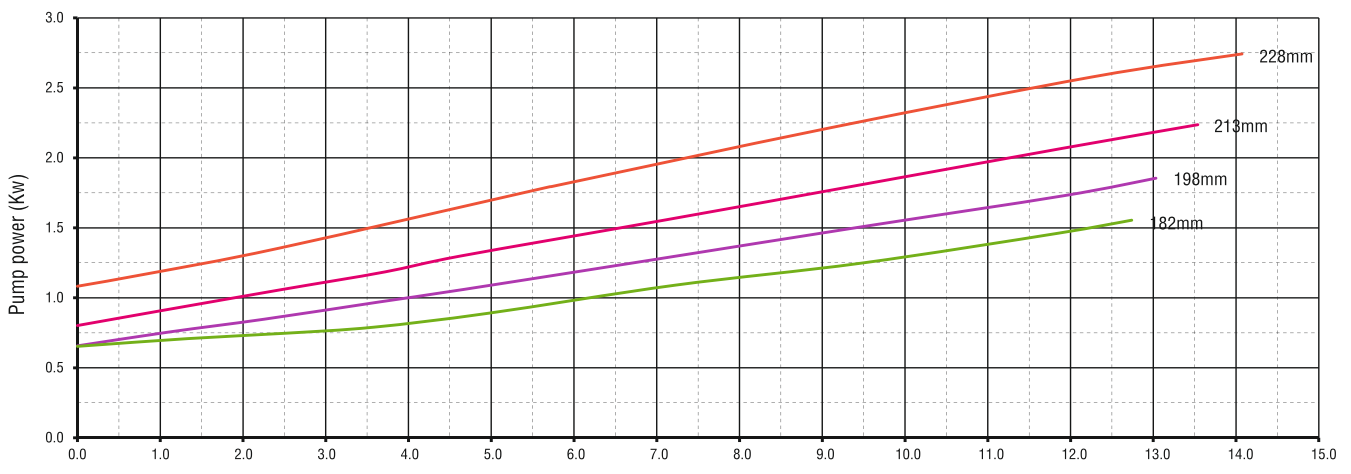
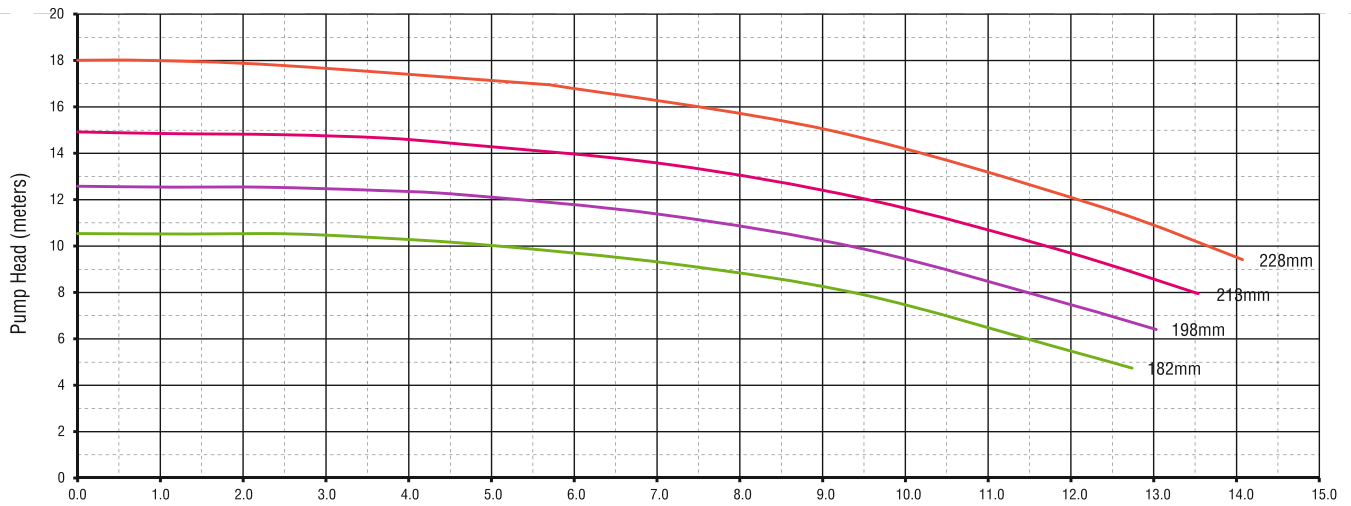


IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road
 Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA
 Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800
 Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 4 Pole - 1450 RPM

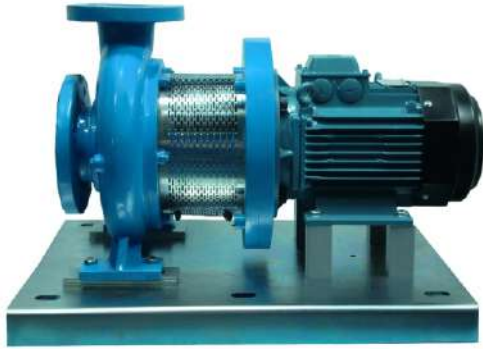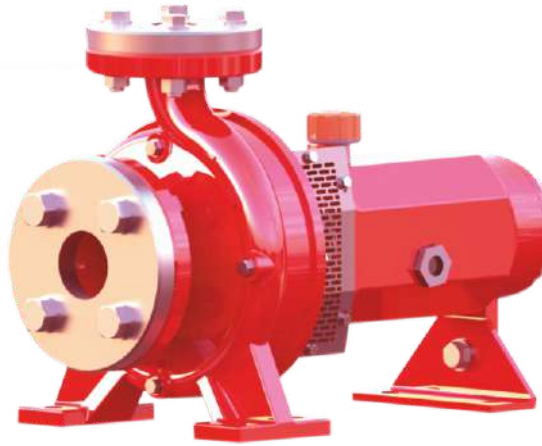

Standard

200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

| Sl. | Model Number | Impeller Dia mm | Frame Size | Max. Shaft Power | Max. Speed RPM | Max. Head Mtr. | Max. Flow LPS |
|-----|-----------------------|-----------------|------------|------------------|----------------|----------------|---------------|
| 1 | FPS-100x65-200-2.20/4 | 182 | 100L | 2.20Kw | 1450 | 11.5 | 19.3 |
| 2 | FPS-100x65-200-3.00/4 | 198 | 100L | 3.00Kw | 1450 | 14.0 | 20.2 |
| 3 | FPS-100x65-200-4.00/4 | 213 | 112M | 4.00Kw | 1450 | 17.0 | 21.5 |
| 4 | FPS-100x65-200-5.50/4 | 228 | 135S | 5.50Kw | 1450 | 18.5 | 21.9 |

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

IHP: UPDATED ON 04-06-2022 | www.ihpindia.in

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road


Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

100 x 65 - 200 - 4 Pole - Fixed Speed - 1450 RPM

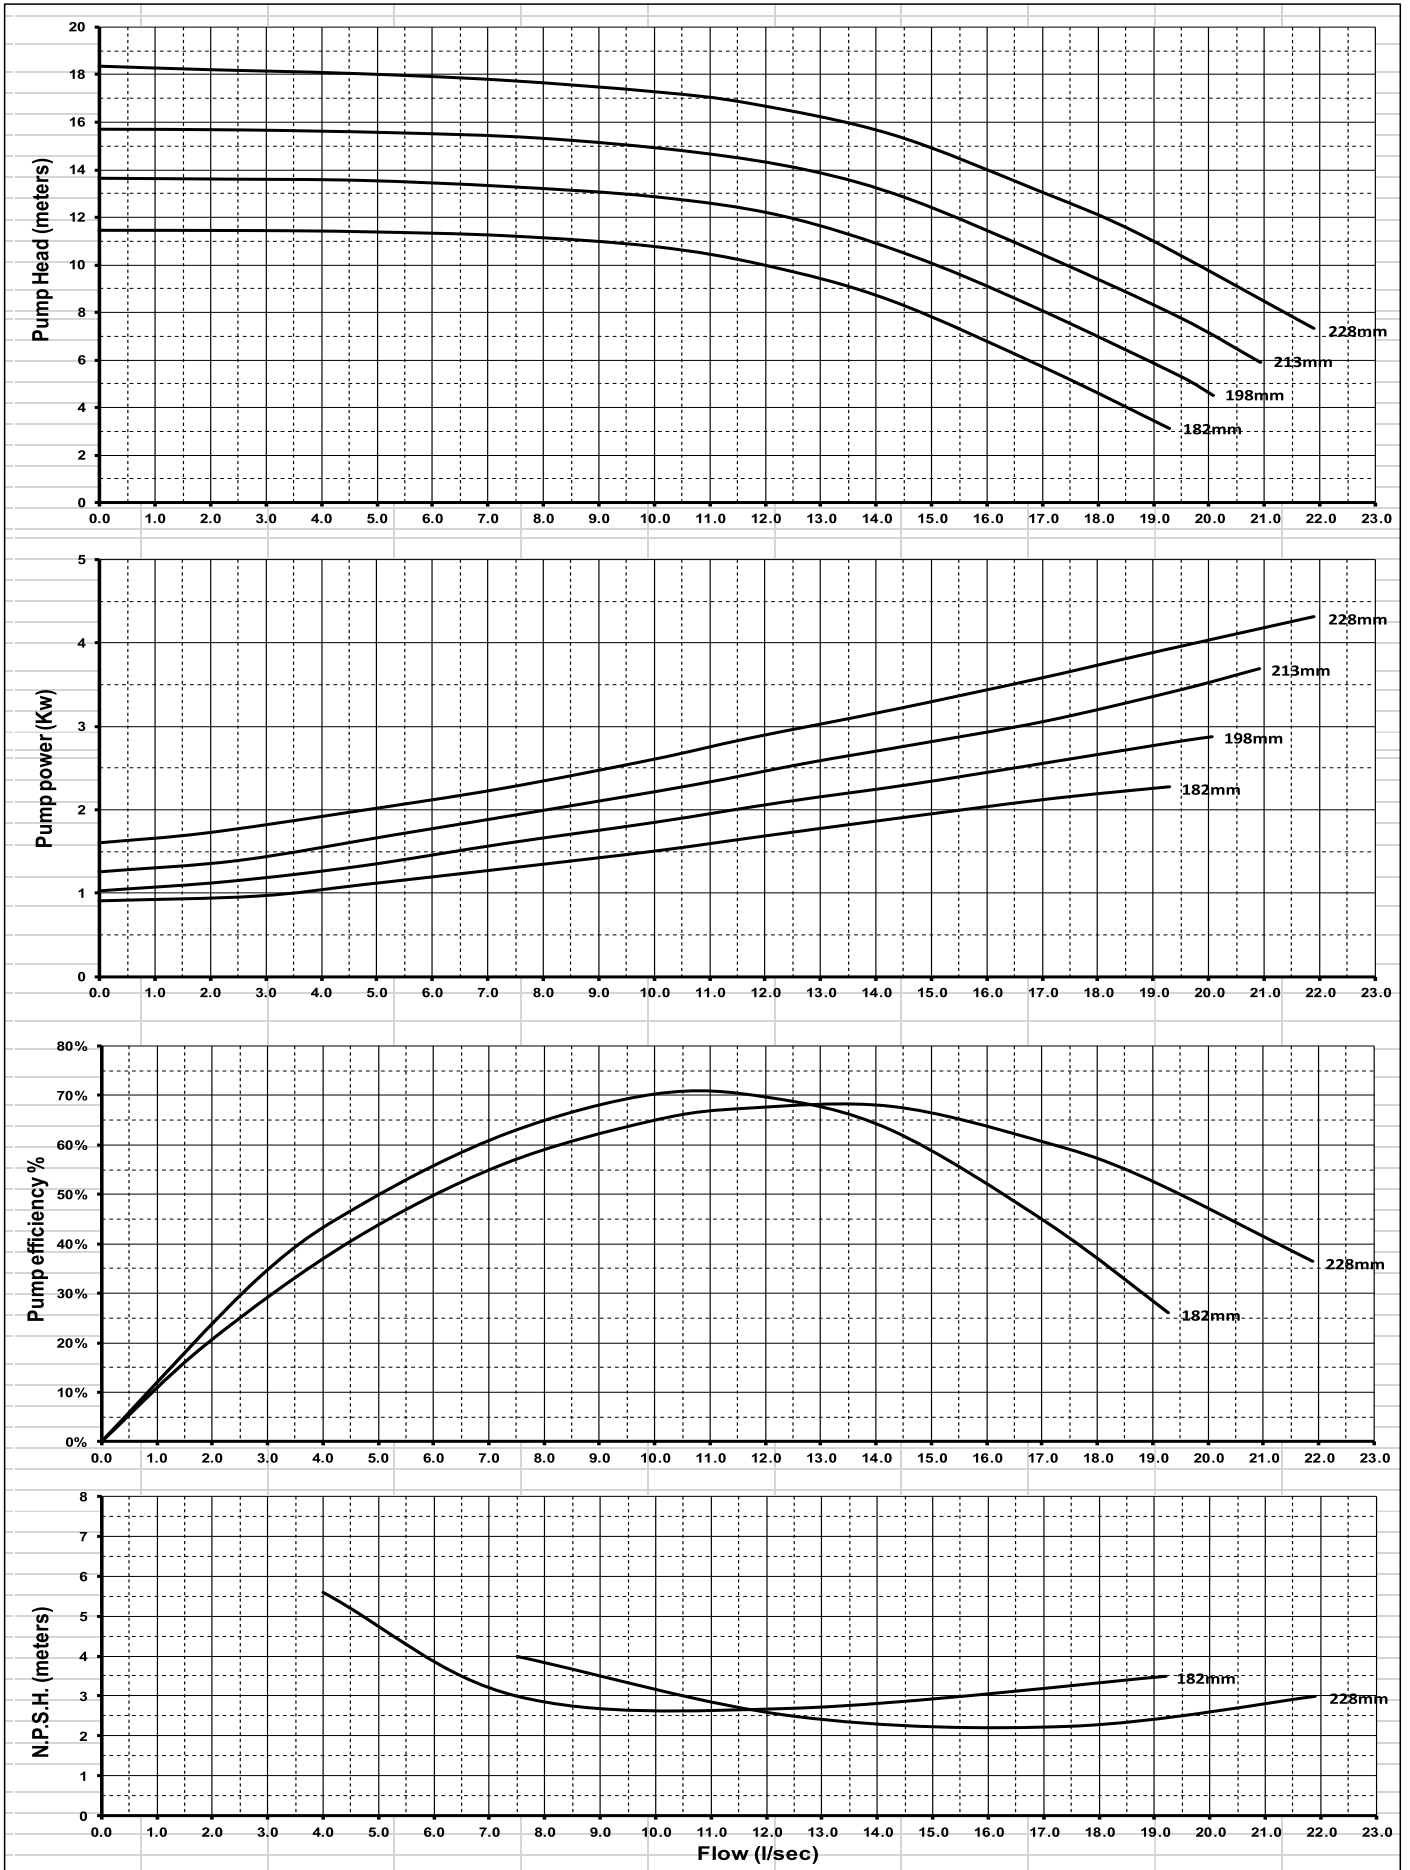

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD


No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 200 Series - 4 Pole - 1450 RPM

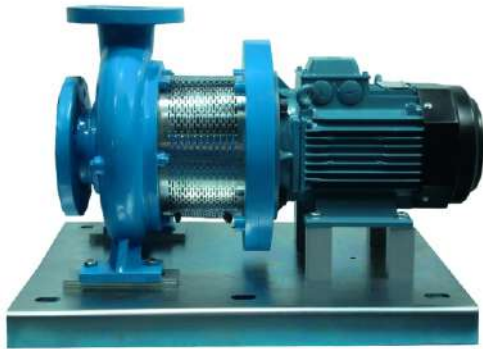

Standard

200 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

| Sl. | Model Number | Impeller Dia mm | Frame Size | Max. Shaft Power | Max. Speed RPM | Max. Head Mtr. | Max. Flow LPS |
|-----|------------------------|-----------------|------------|------------------|----------------|----------------|---------------|
| 1 | FPS-125x100-200-4.00/4 | 198 | 112M | 4.00Kw | 1450 | 12.0 | 34.0 |
| 2 | FPS-125x100-200-5.50/4 | 213 | 132S | 5.50Kw | 1450 | 15.3 | 38.0 |
| 3 | FPS-125x100-200-7.50/4 | 228 | 132M | 7.50Kw | 1450 | 16.5 | 40.3 |

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road





Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

125 x 100 - 200 - 4 Pole - Fixed Speed - 1450 RPM

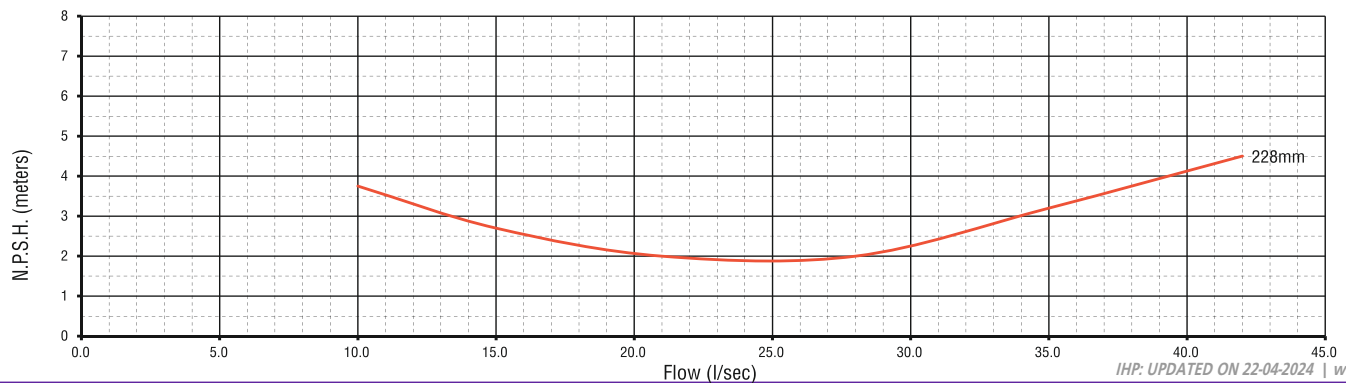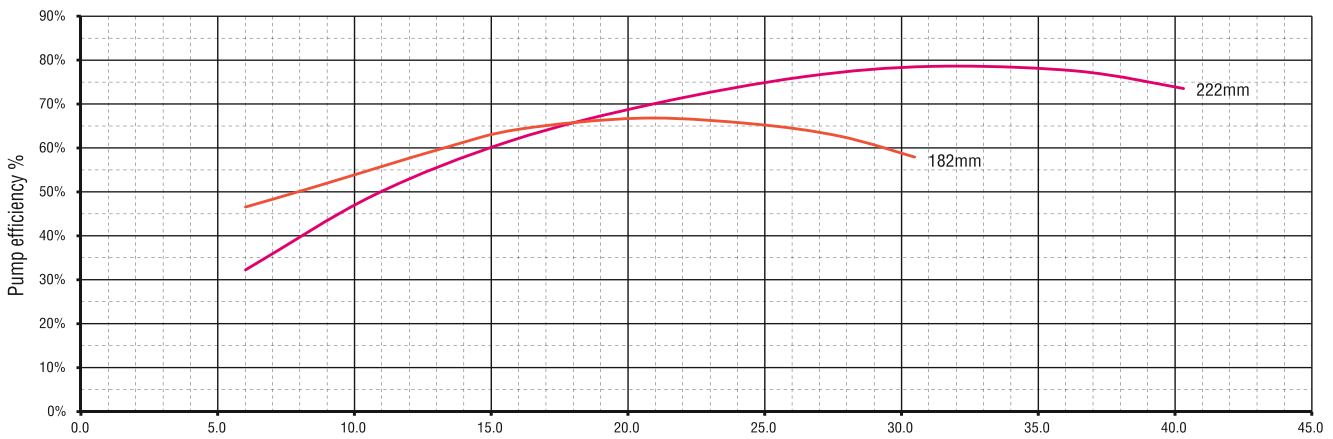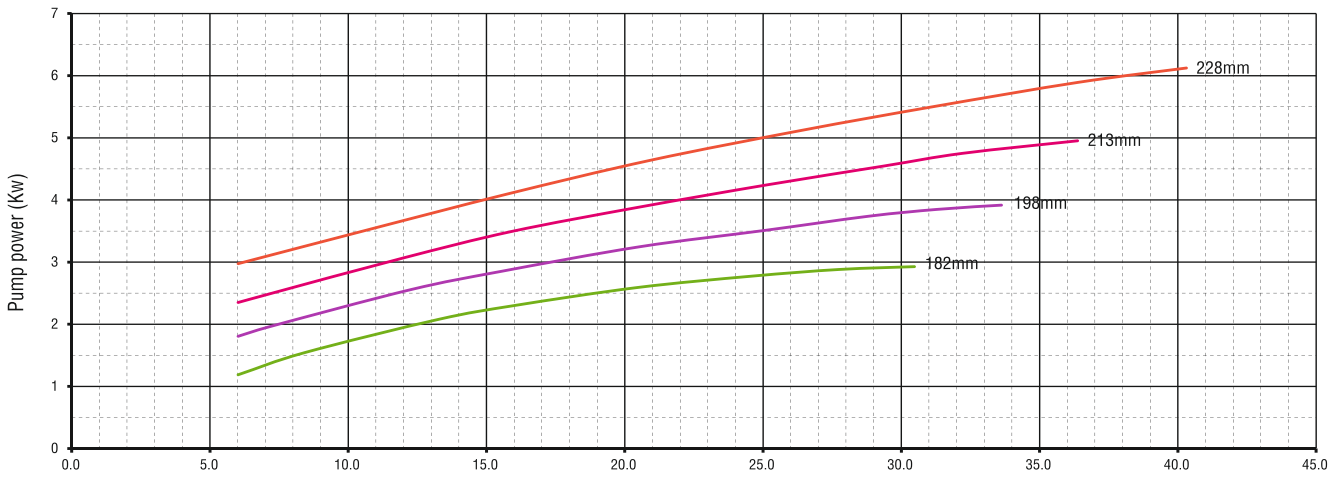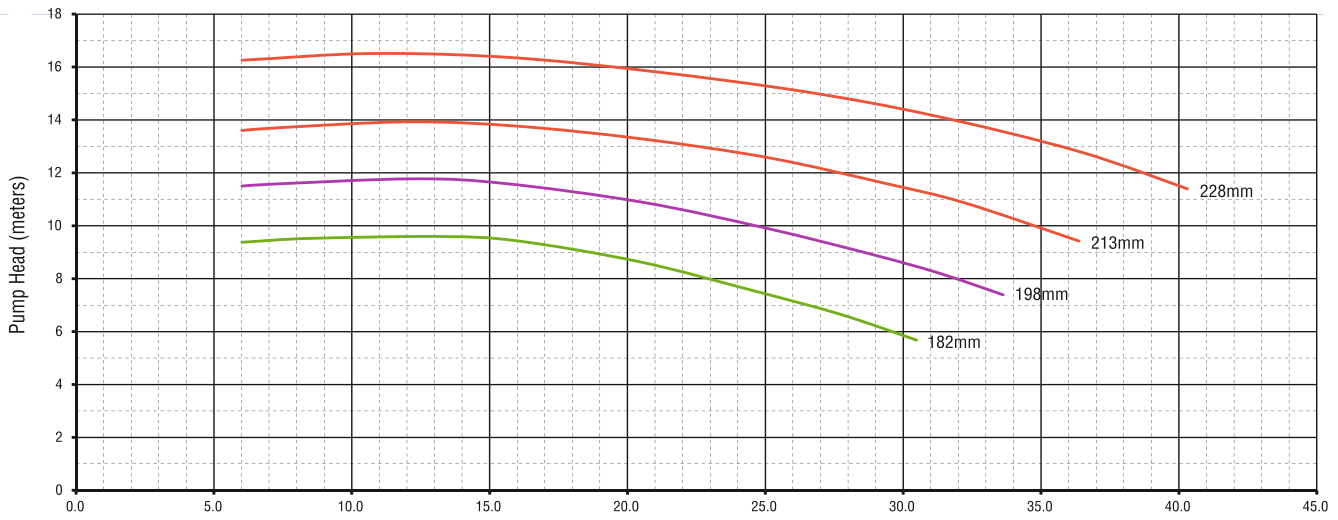

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in