
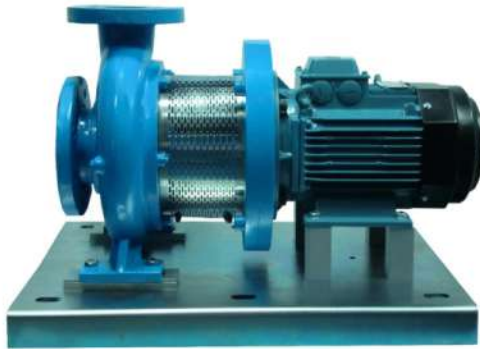


Finsbury - Close couple Pumps 250 Series - 2 Pole - 2920 RPM

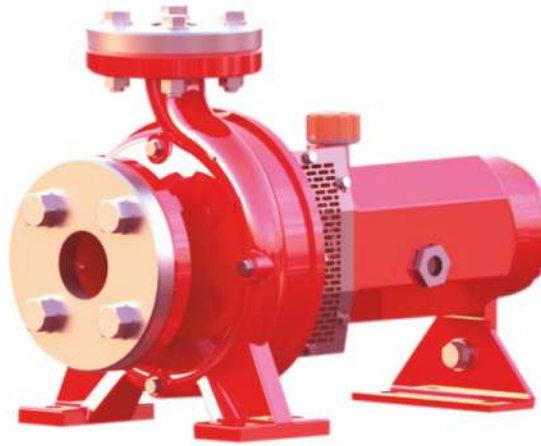

Standard

250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-65X40-250-15.0/2	222	160M	15.0Kw	2950	78.0	13.0
2	FPS-65X40-250-18.5/2	222	160L	18.5Kw	2950	78.0	16.0
3	FPS-65X40-250-22.0/2	240	180M	22.0Kw	2950	88.0	16.8
4	FPS-65X40-250-30.0/2	259	200L	30.0Kw	2950	106.0	18.2
5	FPS-65X40-250-37.0/2	278	200L	37.0Kw	2950	121.0	19.2

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

INDRA HYDRO TECH PUMPS PVT LTD





No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 65 x 40 - 250 - 2 Pole - Fixed Speed - 2920 RPM

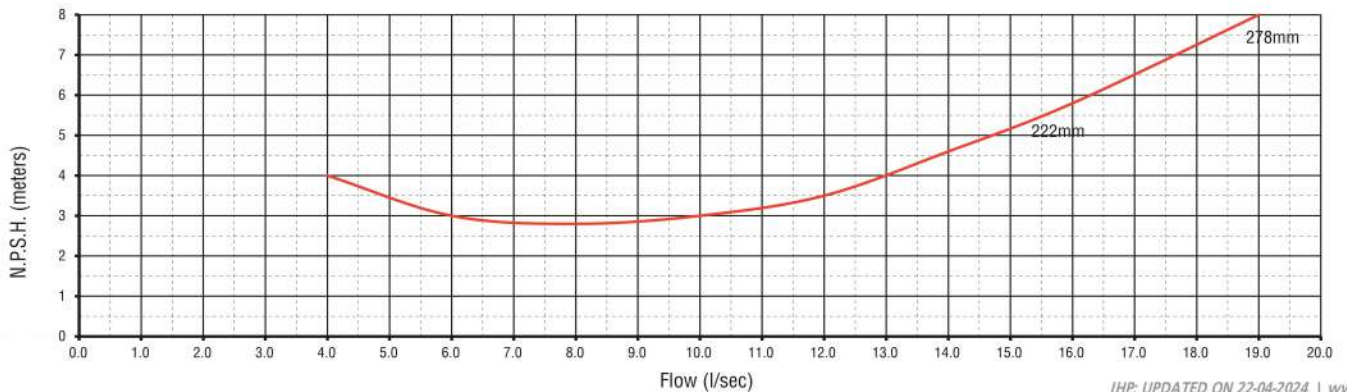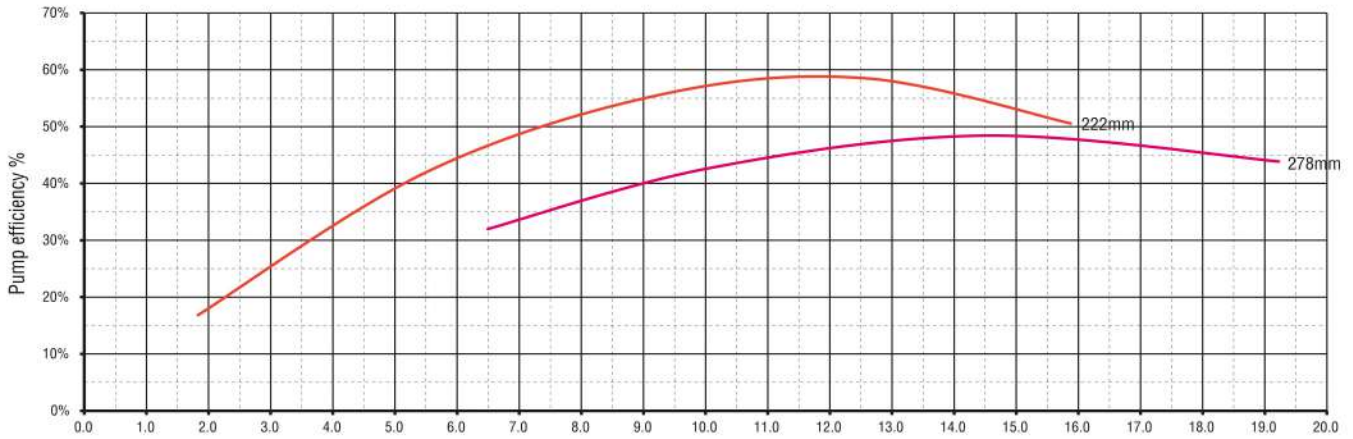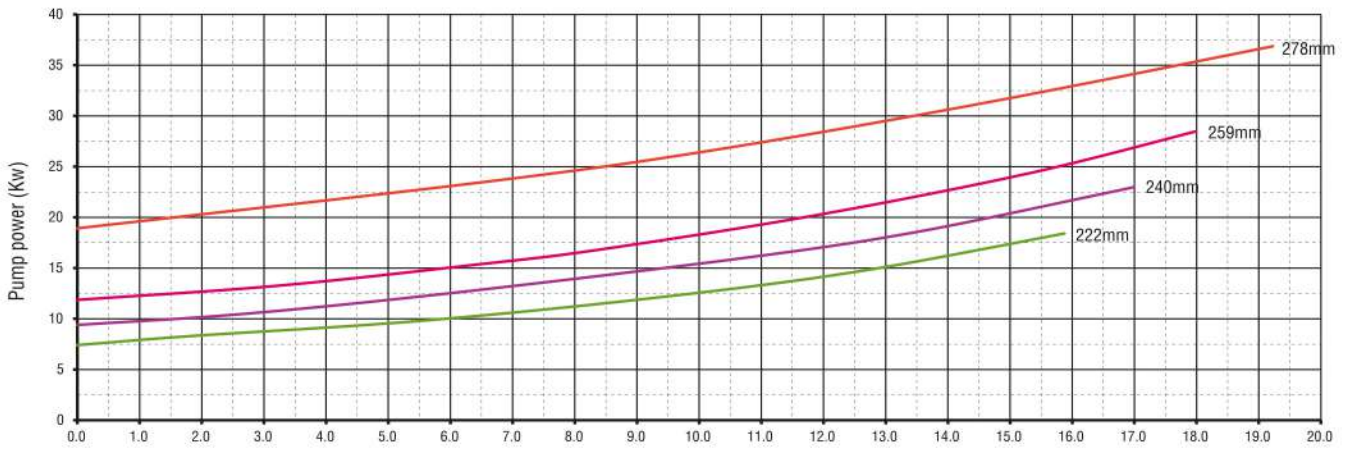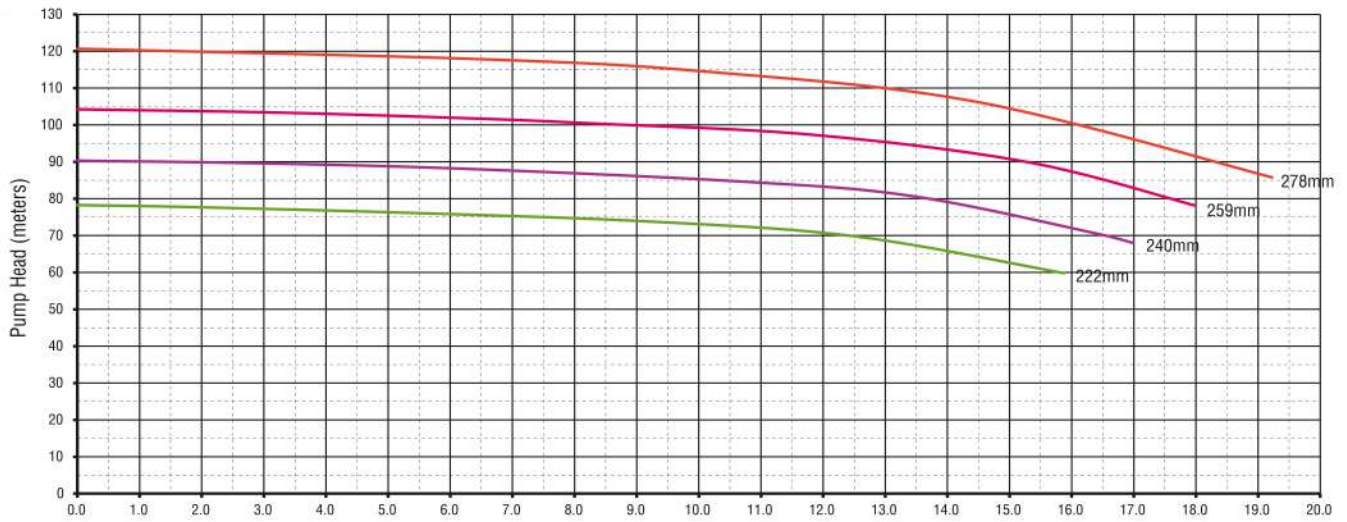

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road



Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps

250 Series - 2 Pole - 2920 RPM

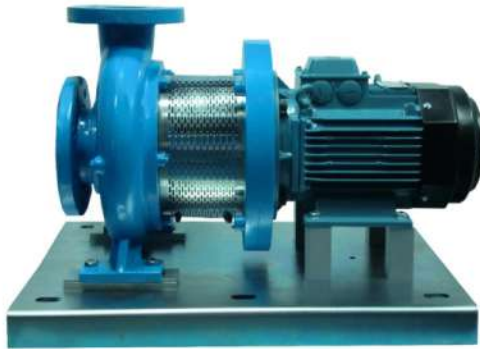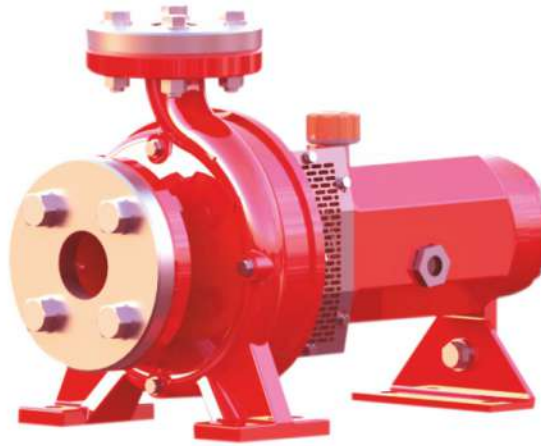

Standard

250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-80X50-250-22.0/2	222	180M	22.0Kw	2950	75.0	20.0
2	FPS-80X50-250-30.0/2	222	200L	30.0Kw	2950	75.0	29.0
3	FPS-80X50-250-37.0/2	240	200L	37.0Kw	2950	87.0	30.0
4	FPS-80X50-250-45.0/2	259	225M	45.0Kw	2950	102.0	31.7
5	FPS-80X50-250-55.0/2	278	250M	55.0Kw	2950	119.0	31.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road





Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

80 x 50 - 250 - 2 Pole - Fixed Speed - 2920 RPM

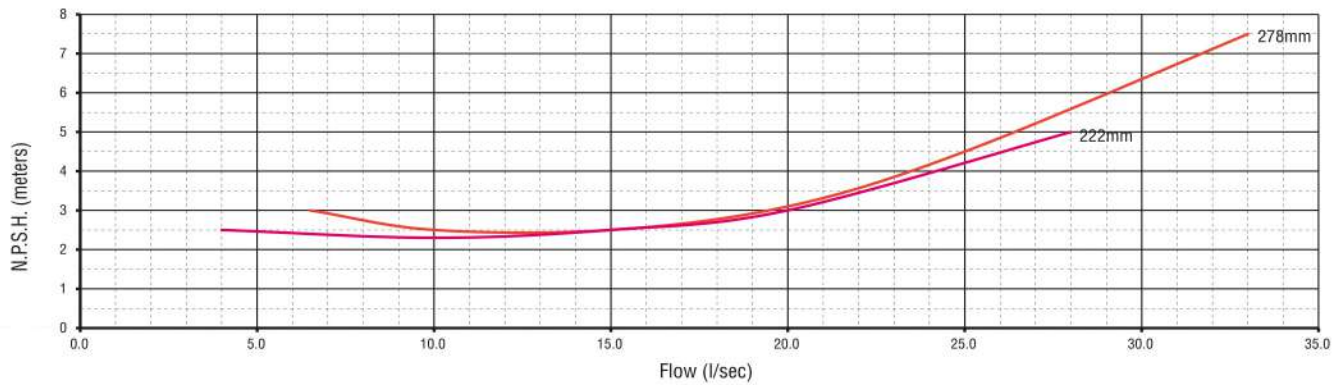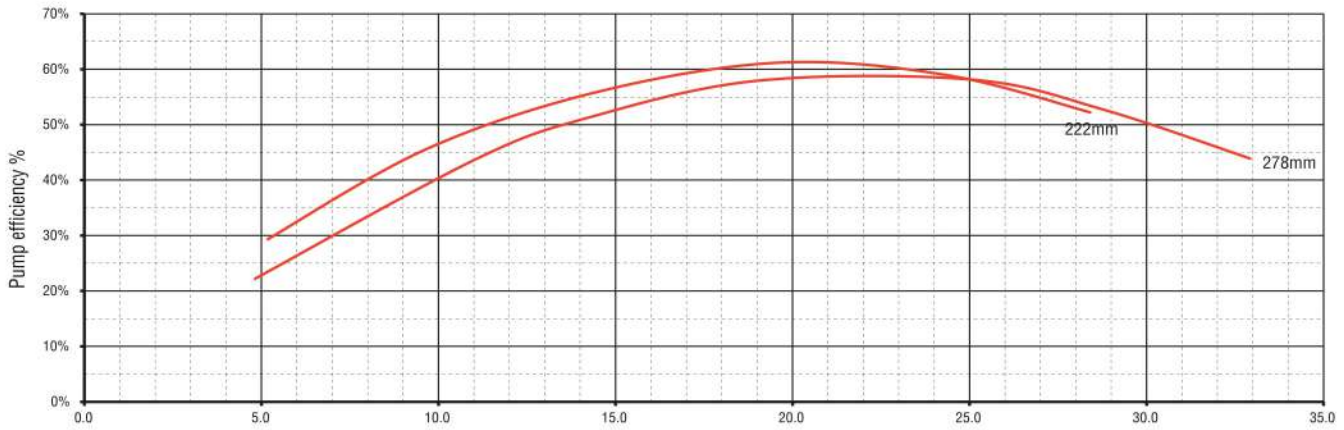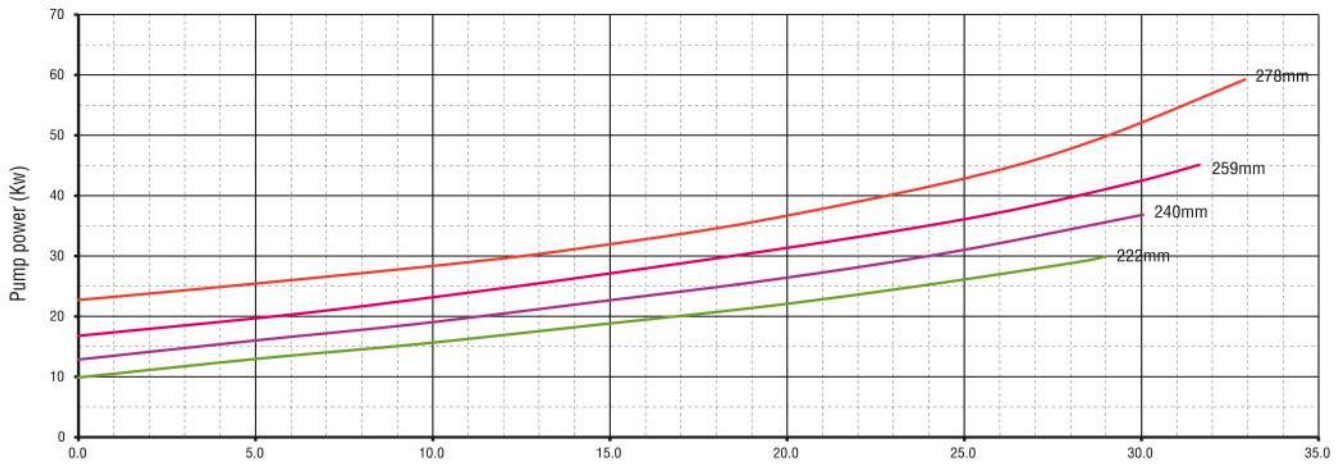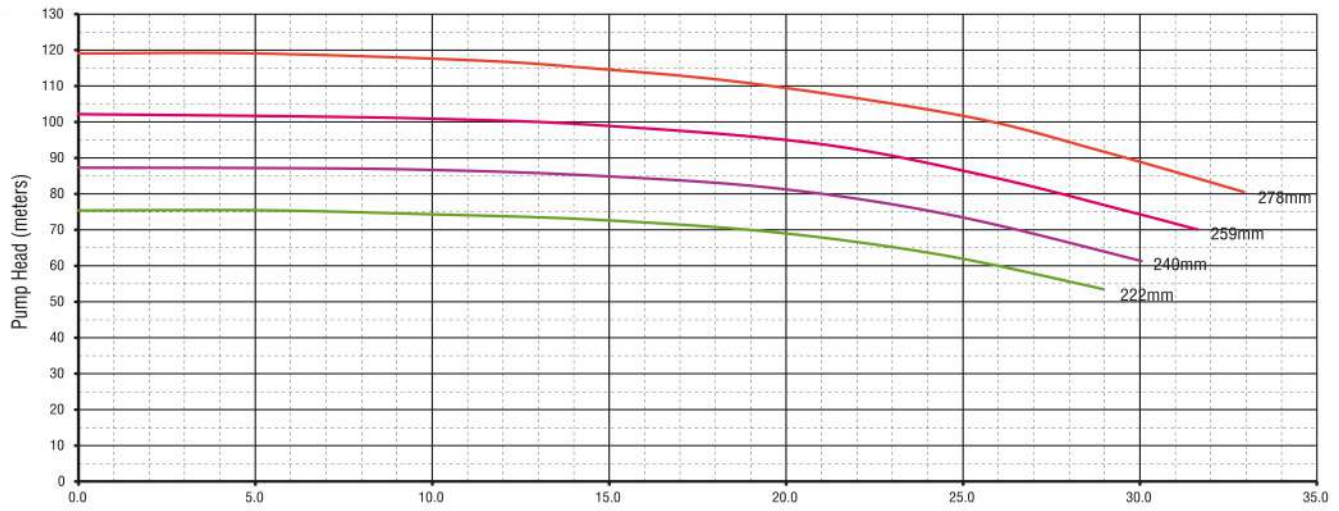

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD



No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 250 Series - 2 Pole - 2920 RPM

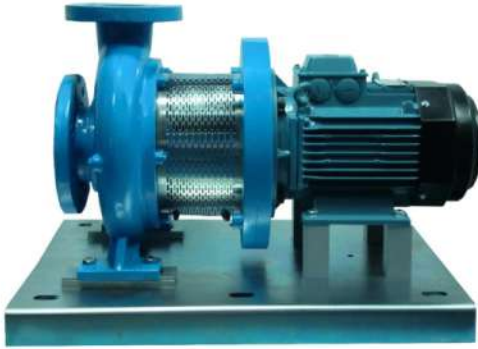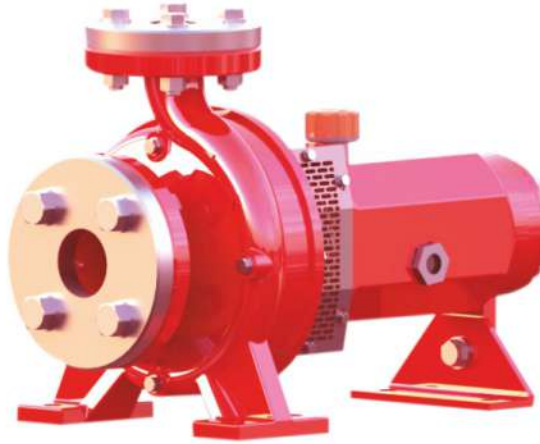

Standard





250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-100X65-250-30.0/2	222	200L	30.0Kw	2950	65.0	32.0
2	FPS-100X65-250-37.0/2	222	200L	37.0Kw	2950	66.0	43.0
3	FPS-100X65-250-45.0/2	240	225M	45.0Kw	2950	77.0	43.8
4	FPS-100X65-250-55.0/2	259	250M	55.0Kw	2950	90.0	45.0
5	FPS-100X65-250-75.0/2	278	280S	75.0Kw	2950	107.0	47.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 100 x 65 - 250 - 2 Pole - Fixed Speed - 2920 RPM

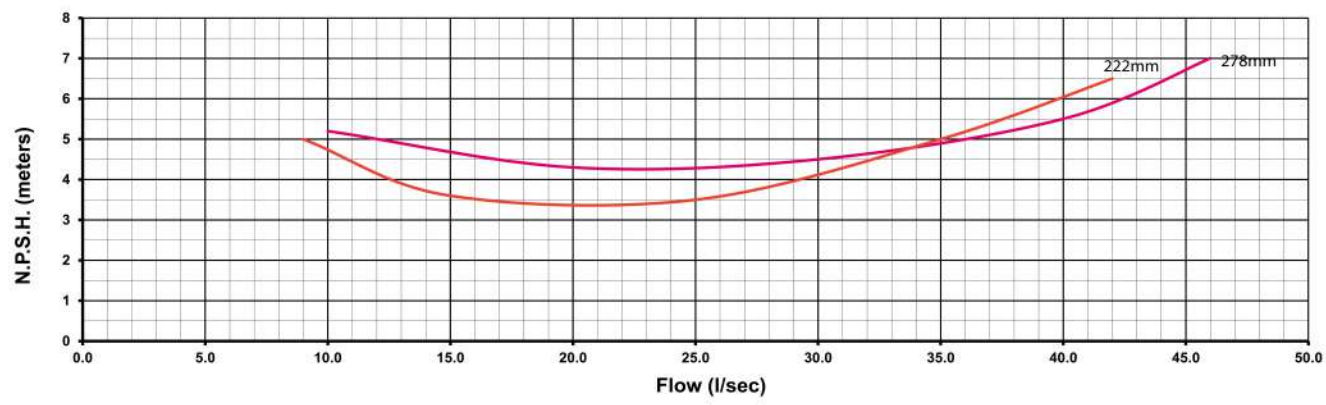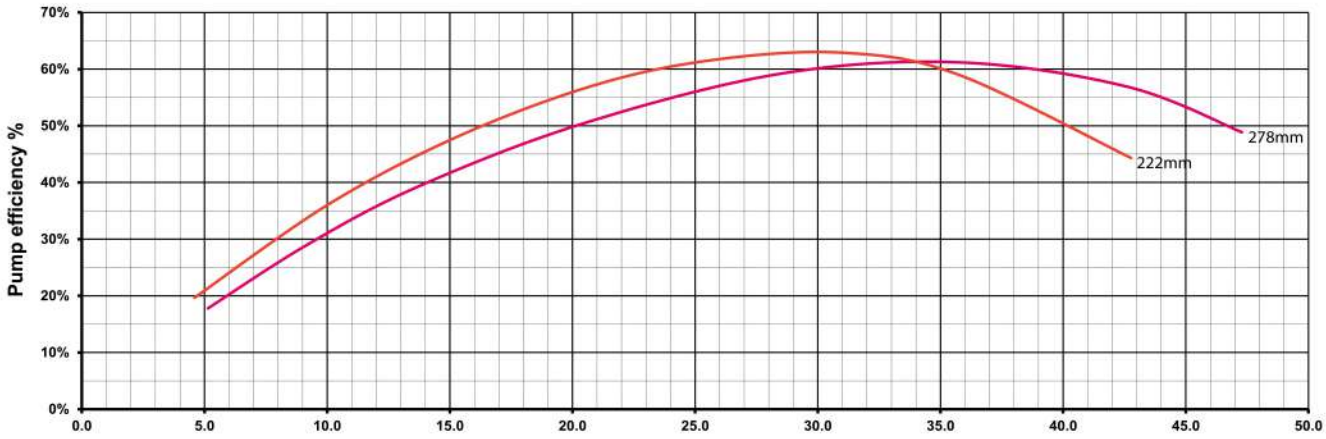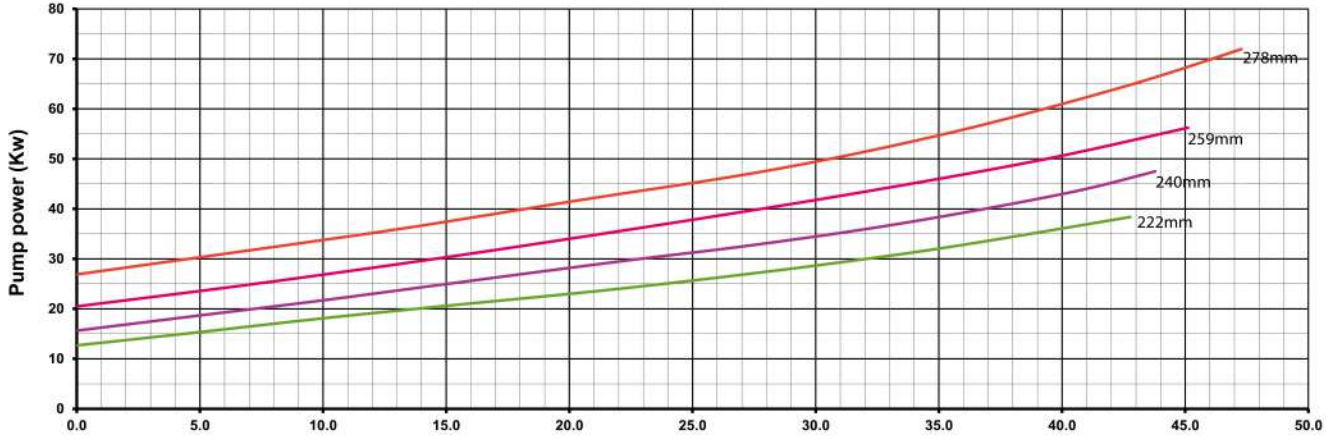
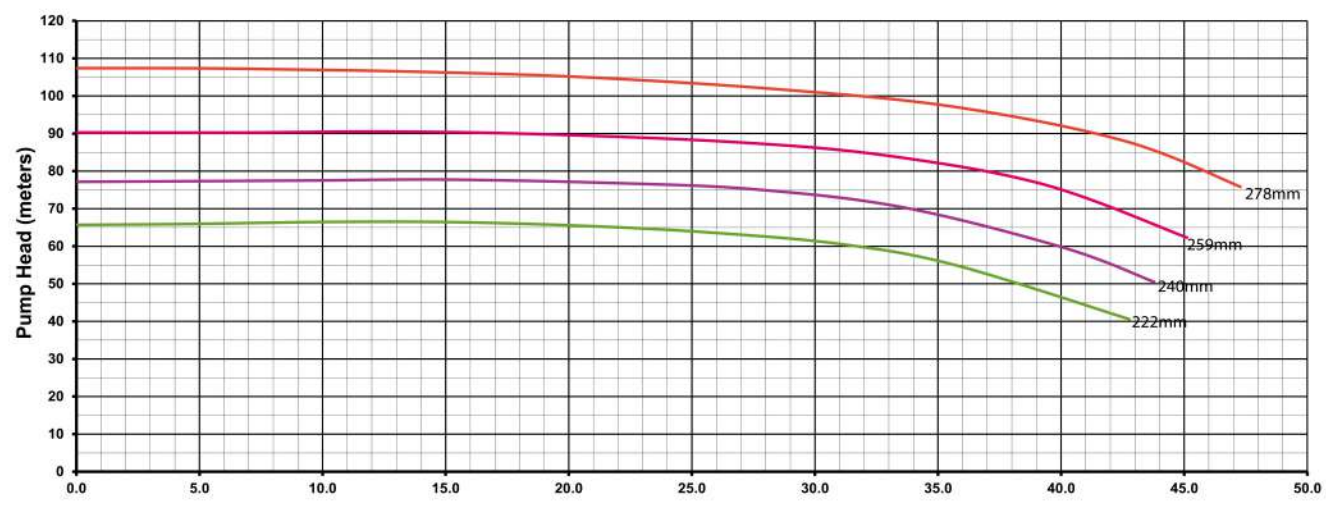


IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road
Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA
Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800
Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 250 Series - 2 Pole - 2920 RPM

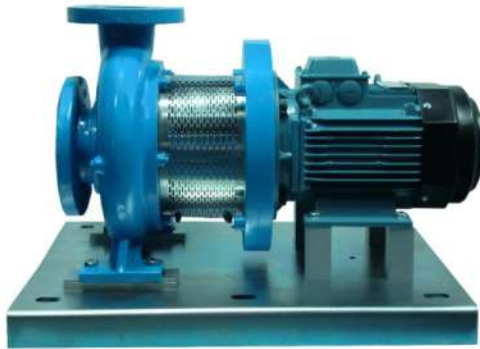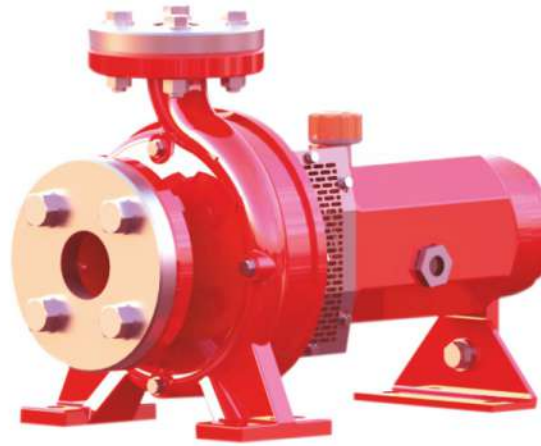

Standard





250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-125X100-250-55.0/2	222	250M	55.0Kw	2950	71.0	81.0
2	FPS-125X100-250-75.0/2	240	280S	75.0Kw	2950	89.0	89.0
3	FPS-125X100-250-90.0/2	259	280M	90.0Kw	2950	99.0	91.0
4	FPS-125X100-250-110.0/2	278	315S	110.0Kw	2950	115.0	93.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 125 x 100 - 250 - 2 Pole - Fixed Speed - 2920 RPM

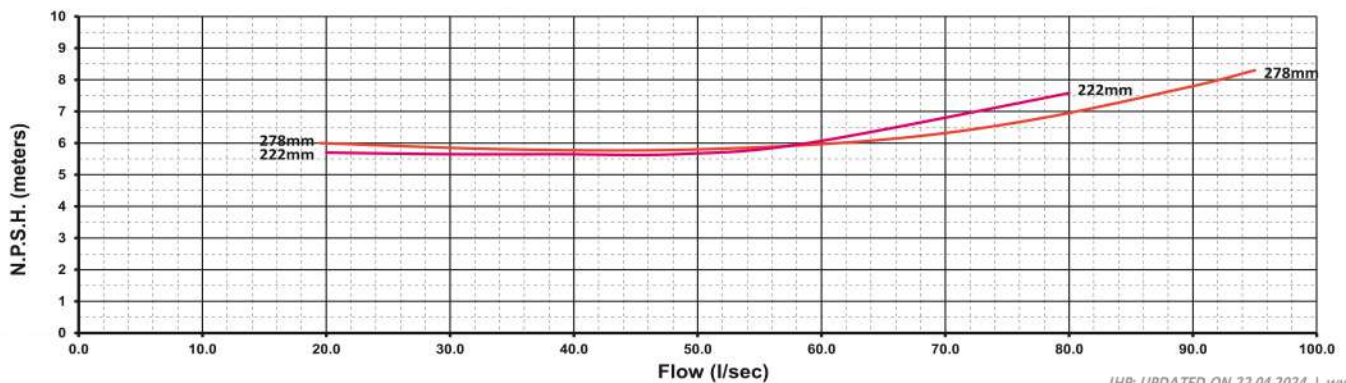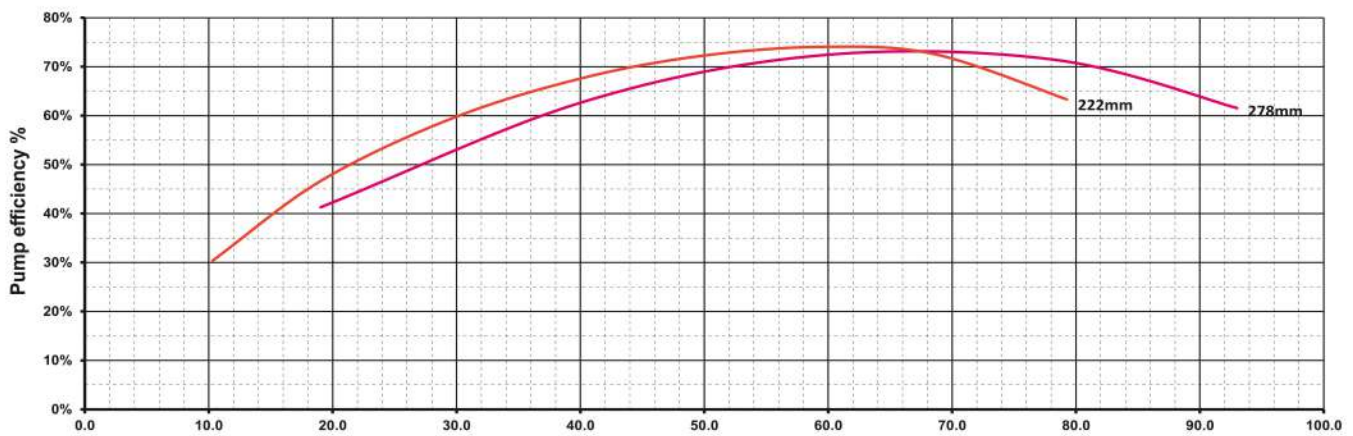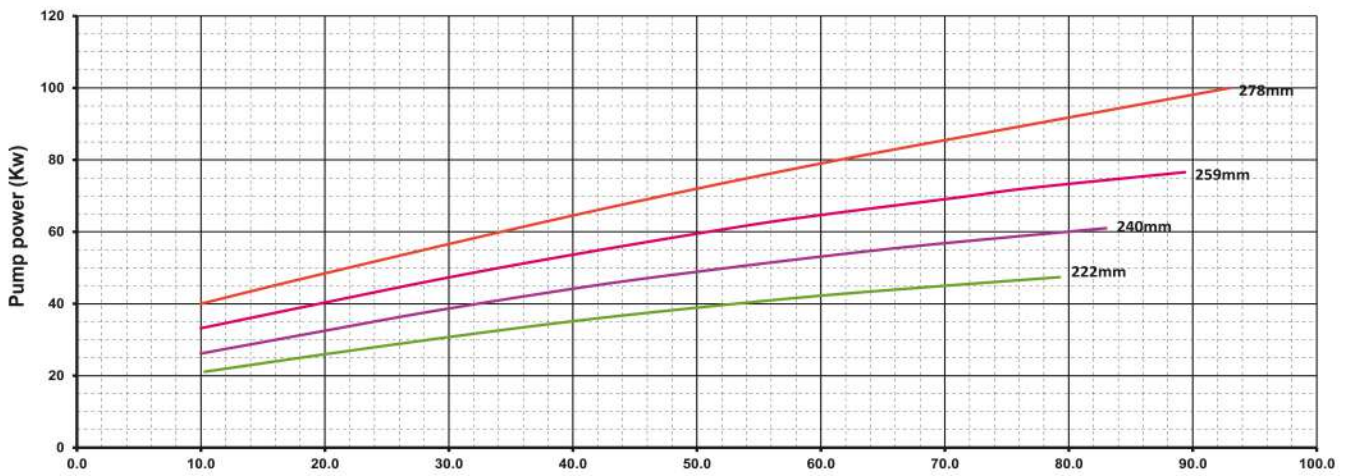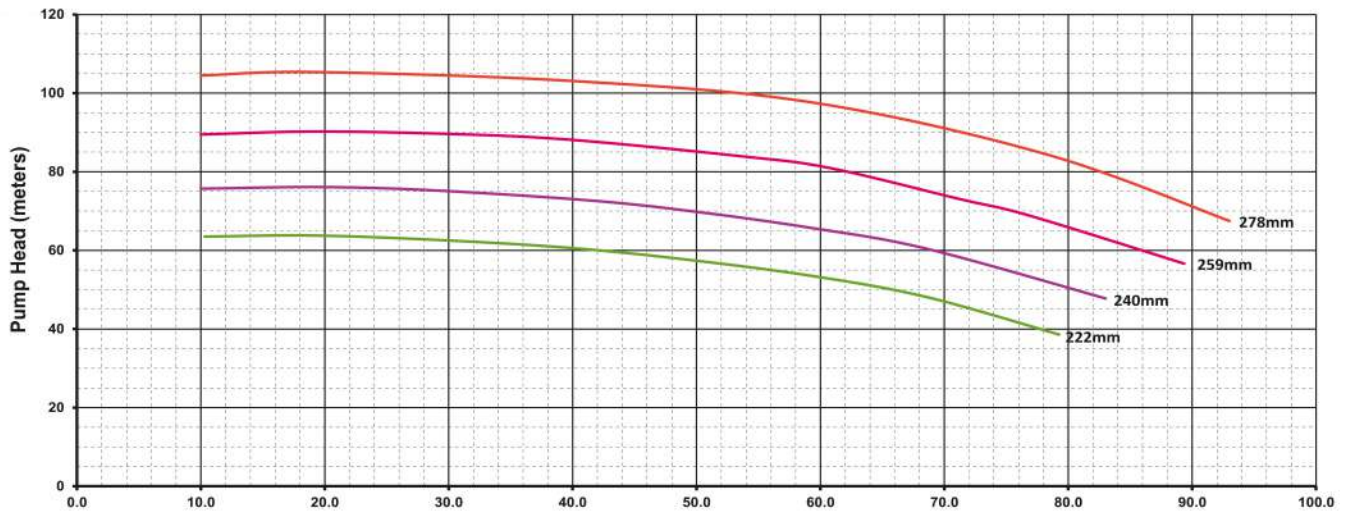

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in