

DRAINAGE SUBMERSIBLE PUMPS (SG500/7 - SS304) 2 Pole

The Indra Hydro Tech Pumps COMMANDER range of drainage pumps come with stainless steel and cast iron as options. The commander range of SWW (Stainless Steel) / CWW (Cast Iron) pumps are great performers and due to their material of construction have durable corrosion resistance. The double mechanical silicon carbide seals, cooled in a sealed oil bath gives longer bearing life. Larger pump units are available with "Duckfoot" extraction systems. All single phase pumps are available with or without float switches.

CODE	MODEL SWW/CWW	POWER			OPERATION	MAXIMUM		IMPELLER TYPE	SOLIDS HANDLING	CABLE LENGTH SWW/CWW	OUTLET		WEIGHT KG	SIZE L x W x H (mm)
		VOLTAGE	AMPS 1Ø/3Ø	WATTAGE kw/hp		FLOW (LPM)	HEAD (M)				mm	inch		
9009/9010	1052F/3052	240/415	2.75/1.	0.37/0.5	Auto-1Ø	213	11.19	Semi-open	7mm	10/5 M	50	2"	14	227x162x360
9011/9012	112F/312	240/415	5.5/1.9	0.75/1.0	Auto-1Ø	368	12.21	Semi-open	10mm	10/5 M	50	2"	19.5	248x182x437
9013/9014	1152F/3152	240/415	6./2.6	1.1/1.5	Auto-1Ø	400	13.63	Semi-open	10mm	10/5 M	50	2"	23	255x180x460
9015/9016	1153F/3153	240/415	6/2.6	1.1/1.5	Auto-1Ø	701	12.41	Semi-open	10mm	10/5 M	80	3"	25	304x180x460
9017/9018	123F/323	240/415	12.5/3.9	1.5/2.0	Auto-1Ø	874	15.67	Semi-open	10mm	10/5 M	80	3"	42	1Ø - 363x202x571 3Ø - 381x228x541
9019	333	415	5.5	2.2/3.0	Manual	955	24.24	Semi-open	10mm	10/5 M	80	3"	53	425x235x560
9020	353/354	415	6	3.7/5.0	Manual	1400	24.65	Semi-open	10mm	10/5 M	80/100	3"/4"	59	438x235x700

* Note: Code 9019 & 9020 option available for 4" or 10mm delivery size

APPLICATIONS



- Chemical Plants
- Food Processing
- Wineries
- Industrial Process
- Trade Waste
- Poultry Farm

FEATURES AND BENEFITS

- Flow upto 23 L/sec
- Various impellers types
- H-class winding - IP68 protection
- Viton oil seals
- Silicon carbide seal
- Thermal overload protection - YAMADA
- Mac 3 float switch for single phase

CONSTRUCTION

- Precision wax casting (SS304)
- High quality cast iron parts (FG200/SGIRON)
- Epoxy filled cable - 5mts for FG200 & 10mts for SS
- Oil filled mechanical seal

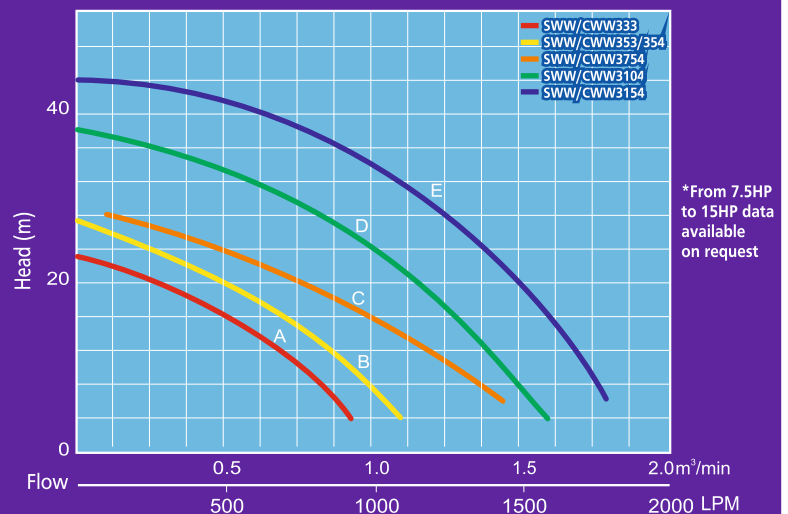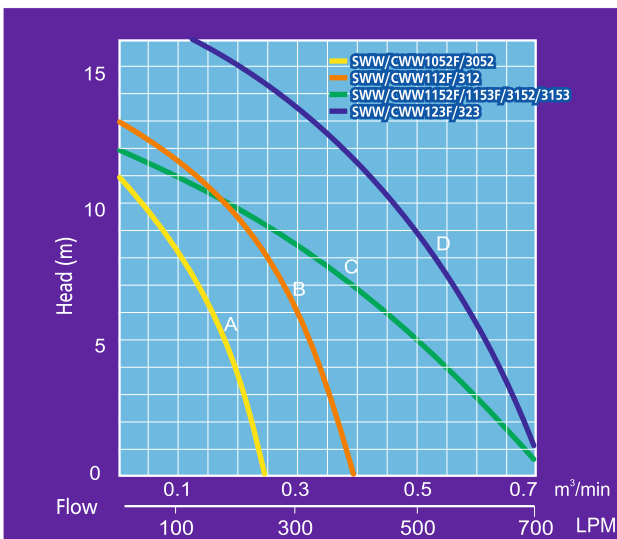

*From 7.5HP to 15HP data available on request

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in